


ENERGIZER EN91

AA



Industry Standard Dimensions

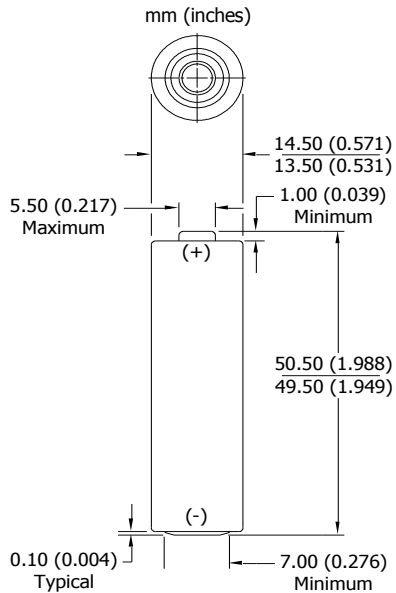


Specifications

NOT INTENDED FOR RETAIL TRADE

- Classification:** Alkaline
- Chemical System:** Zinc-Manganese Dioxide (Zn/MnO₂)
No added mercury or cadmium
- Designation:** ANSI-15A, IEC-LR6
- Nominal Voltage:** 1.5 volts
- Nominal IR:** 150 to 300 milliohms (fresh)
- Operating Temp:** -18°C to 55°C (0°F to 130°F)
- Typical Weight:** 23.0 grams (0.8 oz.)
- Typical Volume:** 8.1 cubic centimeters (0.5 cubic inch)
- Jacket:** Plastic Label
- Shelf Life:** 10 years at 21°C
- Terminal:** Flat Contact


Milliamp-Hours Capacity

Continuous discharge to 0.8 volts at 21°C

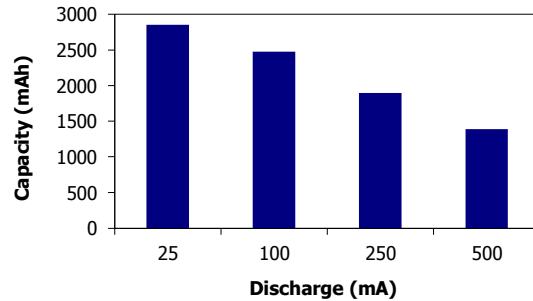


Constant Power Performance

Typical Characteristics (21°C)

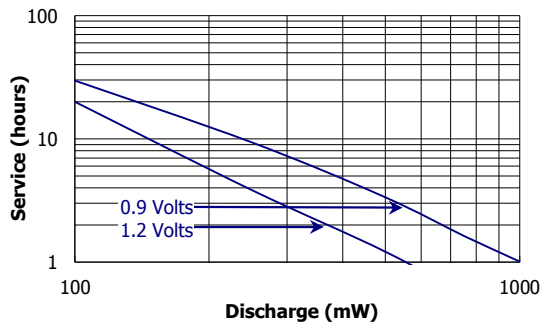

Constant Current Performance

Typical Characteristics (21°C)

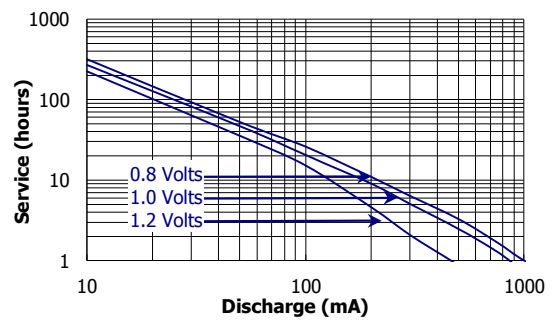

Important Notice


This data sheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

ENERGIZER EN91

AA


Constant Power Performance

Discharge Characteristics (21°C)




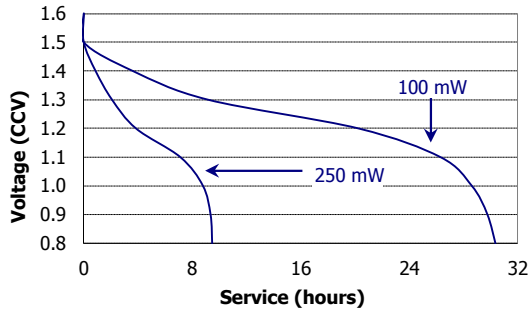


Constant Current Performance

250 mA Discharge (-20°C / 0°C / 21°C)

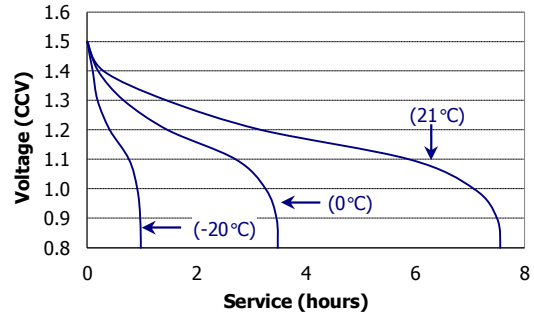

Industry Standard Tests (21°C)

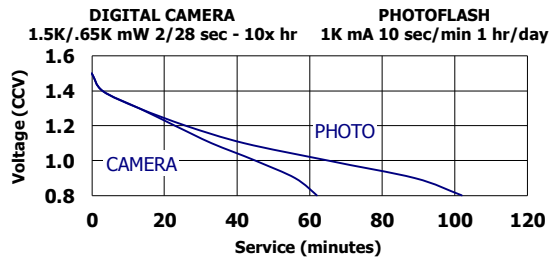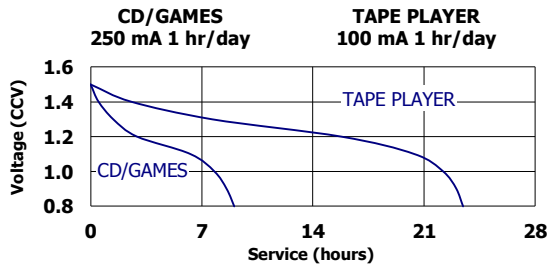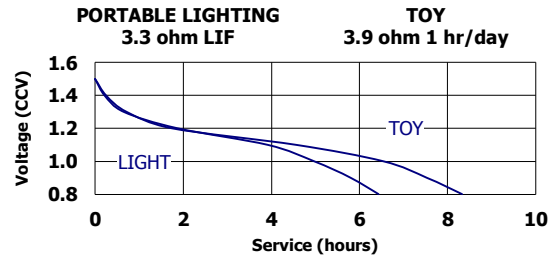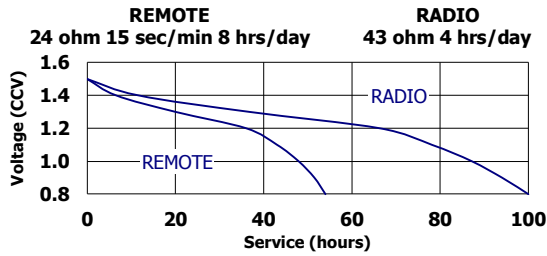

Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.