

# SPECIFICATION



ER34615M 3.6V

Li-SOCL2 Battery

## Electrical characteristics

(Typical values relative to cells stored for one year at +30 °C max)

○ Nominal capacity	14000mAh
Discharged capacity at 15mA, +25 °C, 2.0V cut off	
○ Open circuit voltage	3.66V
○ Max. recommended continuous current	1800mA
○ Max. Pulse capability	3500mA
3500mA, 0.1 second pulses every 2 minutes, drained with 50%, 15mA at 25 °C from undischarged cells with 20µA base current, yield voltage readings above 2.7V, the value may vary according to the pulse characteristics, the temperature and the cell's previous history	
○ Operating temperature rang	-55 °C ~ +80 °C

## STORAGE:

Stored in clean, dry and cool circumstances (the temperature should be 20 degrees or lower, less than 30 degrees)

## WARNING:

Don't charge, crush, disassemble, expose contents to water, heat above 85°C or may lead to explosion, burn or poison goods leakage. Discarded battery should be buried deeply to the ground.

## Key features

- High and stable operating voltage
- Long shelf life
- Annual self-discharge rate lower than 1% at +25°C
- Long operating life
- High energy density (700wh/kg)
- Wide operating temperature rang
- Stainless steel can and cover
- Hermetic glass-to-metal sealing
- Non-flammable electrolyte
- Compliant with IEC 86-4 safety standard

Restricted for transport (Class 9)

 UL Component Recognition  
File Number MH46165



## Main applications

- Intelligent instrument
- Military electronics instrument
- Alarms or security equipment
- Memory backup
- GPS tracking
- Car electronics
- Professional electronic equipment


.....

# ER34615M 14000mAh

## Discharge characteristics at 25°C

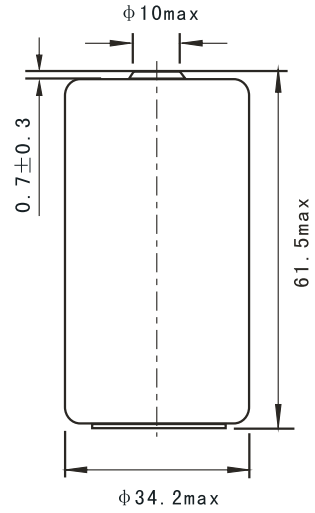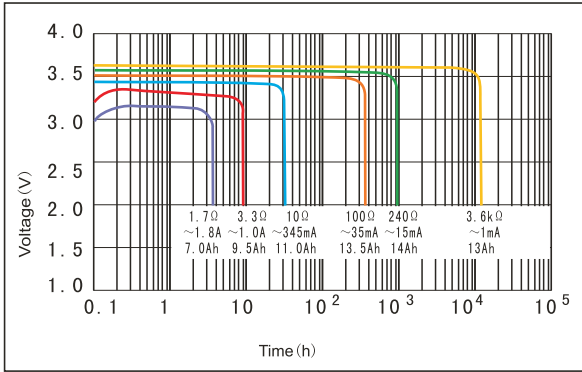


## Voltage vs Temperature curve

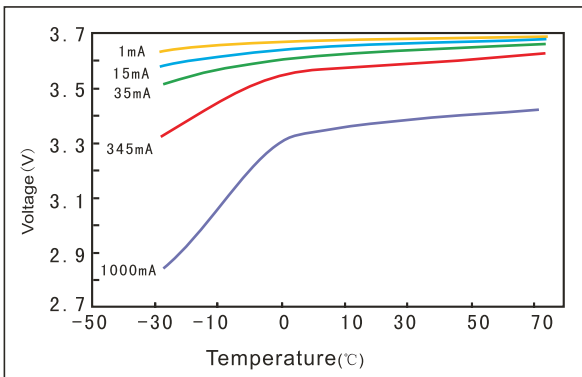


Dimensions in mm  
Weight: 109g

Available Terminations	
-/P*	Axial pin
-/T /PT2*	Radial Pin
-/PT /TP*	Polarized Tab
(*) : Reference to Standard Terminals for Single Cells	

## Capacity vs Current curve (cut off with 2.0V)

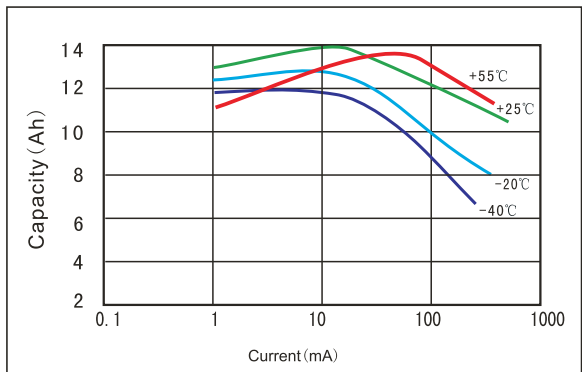

## Discharge characteristics after storage

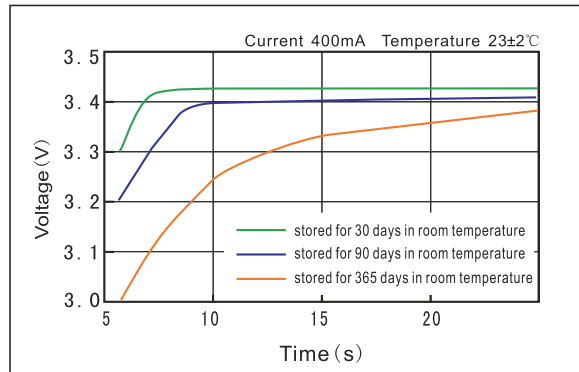

Data in this page is subject to change without notice and becomes contractual only after written confirmation by Fute.

Wuhan FANSO Technology Co.,Ltd

Address: No.1 Sitai Industrial Park, Yongfeng Avenue, Hanyang District, Wuhan City, China.

Tel: 86-27-8445 2920

Fax: 86-27-84453116

Post Code: 430051

Web: [www.fansobattery.com](http://www.fansobattery.com)

Email: [lixif@fansobattery.com](mailto:lixif@fansobattery.com)