



100V P-Channel MOSFETs

General Description


The P5MPM052 uses advanced trench MOSFET technology to provide excellent $R_{DS(ON)}$ and gate charge for use in a wide variety of other applications. The P5MPM052 meets the RoHS and Green Product requirement with full function reliability approved.

BV_{DSS}	$R_{DS(ON)}$	I_D
-100 V	52 m Ω	-50 A

Features

- $R_{DS(ON)} \leq 52m\Omega @ V_{GS} = -10V$
- Fast Switching
- Green Device Available
- Improved dv/dt Capability

PPAK5X6 Pin Configuration

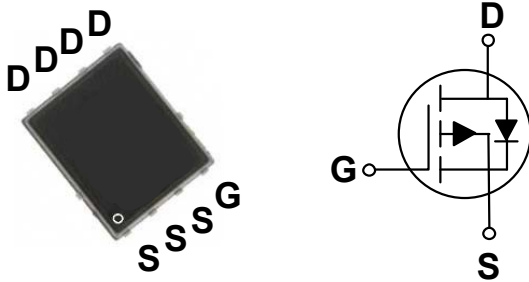

Applications

- Brushless Motor
- Load Switch
- Uninterruptible Power Supply

Absolute Maximum Ratings $T_c=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	-100	V
V_{GS}	Gate-Source Voltage	± 20	V
I_D	Drain Current - Continuous ($T_c=25^\circ\text{C}$)	-50	A
	Drain Current - Continuous ($T_c=100^\circ\text{C}$)	-28	A
I_{DM}	Drain Current - Pulsed (NOTE 1)	-150	A
EAS	Single Pulse Avalanche Energy (NOTE 2)	87	mJ
IAS	Avalanche Current	-35	A
P_D	Total Power Dissipation ($T_c=25^\circ\text{C}$)	113.6	W
T_J	Operating Junction Temperature Range	-55 to 150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
Marking Code		PM052	

Thermal Characteristics

Symbol	Parameter	Rating	Unit
$R_{\theta JA}$	Thermal Resistance Junction to Ambient	25	$^\circ\text{C/W}$
$R_{\theta JC}$	Thermal Resistance Junction to Case	1.1	$^\circ\text{C/W}$

**Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)****Off Characteristics**

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=-250\mu\text{A}$	-100	---	---	V
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=-100V, V_{GS}=0V$	---	---	-1	μA
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 20V, V_{DS}=0V$	---	---	± 100	nA

On Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$R_{DS(ON)}$	Static Drain-Source On-Resistance	$V_{GS}=-10V, I_D=-20\text{A}$	---	---	52	m Ω
		$V_{GS}=-4.5V, I_D=-10\text{A}$	---	---	62	
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS}=V_{DS}, I_D=-250\mu\text{A}$	-1.0	---	-2.5	V

Dynamic and switching Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
Q_g	Total Gate Charge	$V_{DS}=-50V, V_{GS}=-10V, I_D=-5\text{A}$	---	40	---	nC
Q_{gs}	Gate-Source Charge		---	7.8	---	
Q_{gd}	Gate-Drain Charge		---	8.6	---	
$T_{d(on)}$	Turn-On Delay Time	$V_{DD}=-50V, V_{GS}=-10V, R_G=6\Omega, I_D=-5\text{A}$	---	13	---	nS
T_r	Rise Time		---	39	---	
$T_{d(off)}$	Turn-Off Delay Time		---	100.1	---	
T_f	Fall Time		---	105.3	---	
C_{iss}	Input Capacitance	$V_{DS}=-50V, V_{GS}=0V, F=1\text{MHz}$	---	2120	---	pF
C_{oss}	Output Capacitance		---	194	---	
C_{riss}	Reverse Transfer Capacitance		---	13	---	

Drain-Source Diode Characteristics and Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current	$V_G=V_D=0V$, Force Current	---	---	-35	A
V_{SD}	Diode Forward Voltage (NOTE 2)	$V_{GS}=0V, I_S=-30\text{A}$	---	---	-1.2	V
t_{rr}	Reverse Recovery Time	$I_F=-5\text{A}, di/dt=-100\text{A}/\mu\text{s}$,	---	104	---	nS
Q_{rr}	Reverse Recovery Charge	$T_J=25^\circ\text{C}$	---	280	---	nC

NOTES :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. $V_{DD}=-25V, V_{GS}=-10V, L=0.1\text{mH}, I_{AS}=24\text{A}$.
3. The data tested by pulsed , pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.
4. Essentially independent of operating temperature.



Characteristics Curves

FIG. 1 - Drain Current vs. T_C

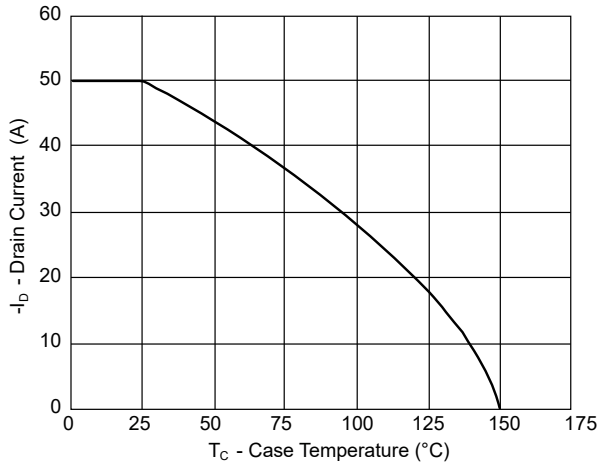


FIG. 2 - Normalized R_{DS(on)} vs. T_J

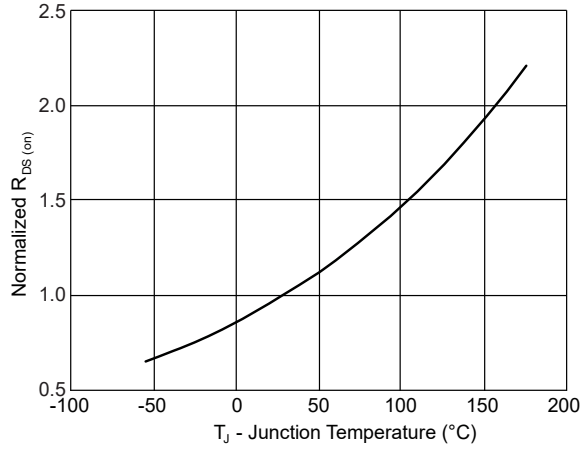


FIG. 3 - Normalized BV_{DSS} vs. T_J

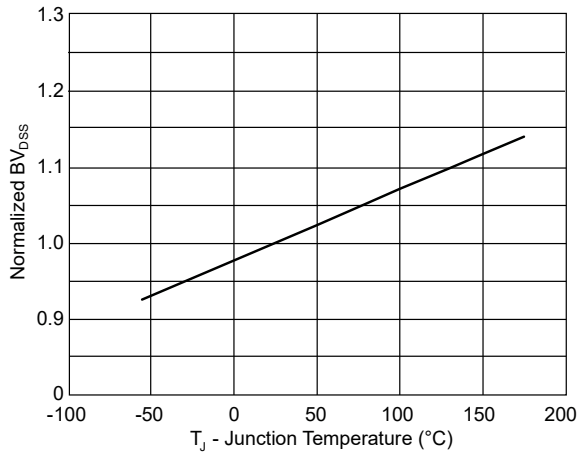


FIG. 4 - Gate Charge Characteristics

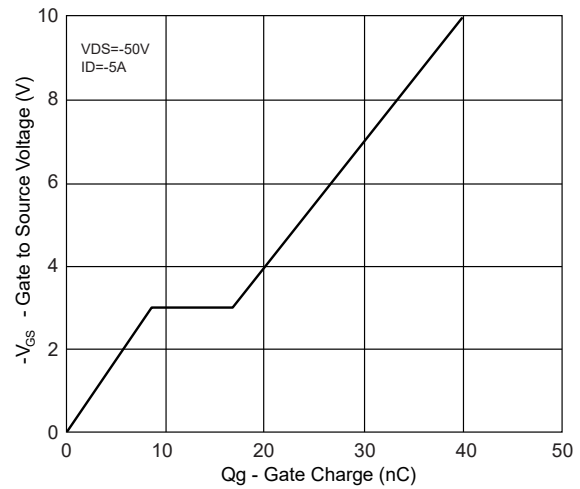


FIG. 5 - Safe Operating Area





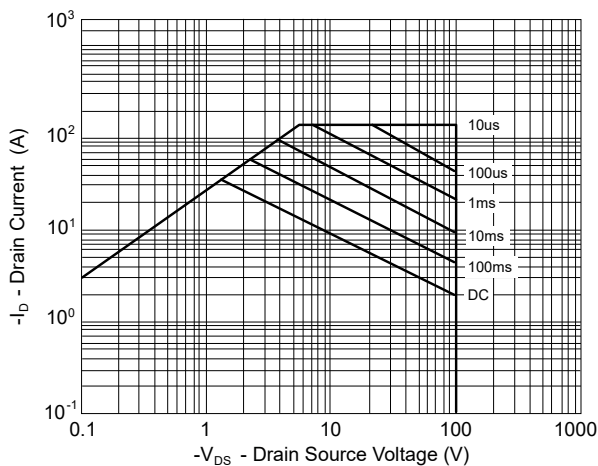


FIG. 6 - Normalized Transient Impedance

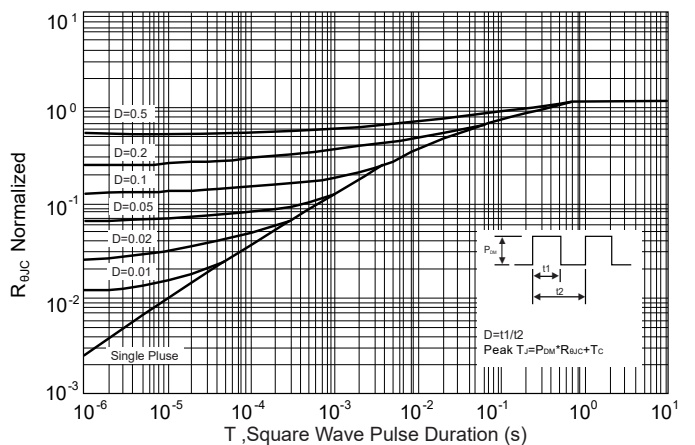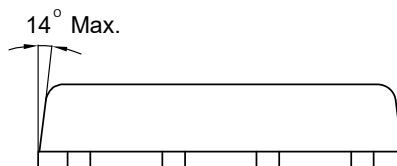

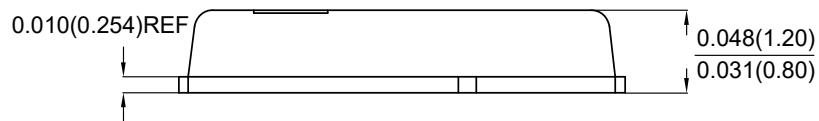

Package Outline Dimensions

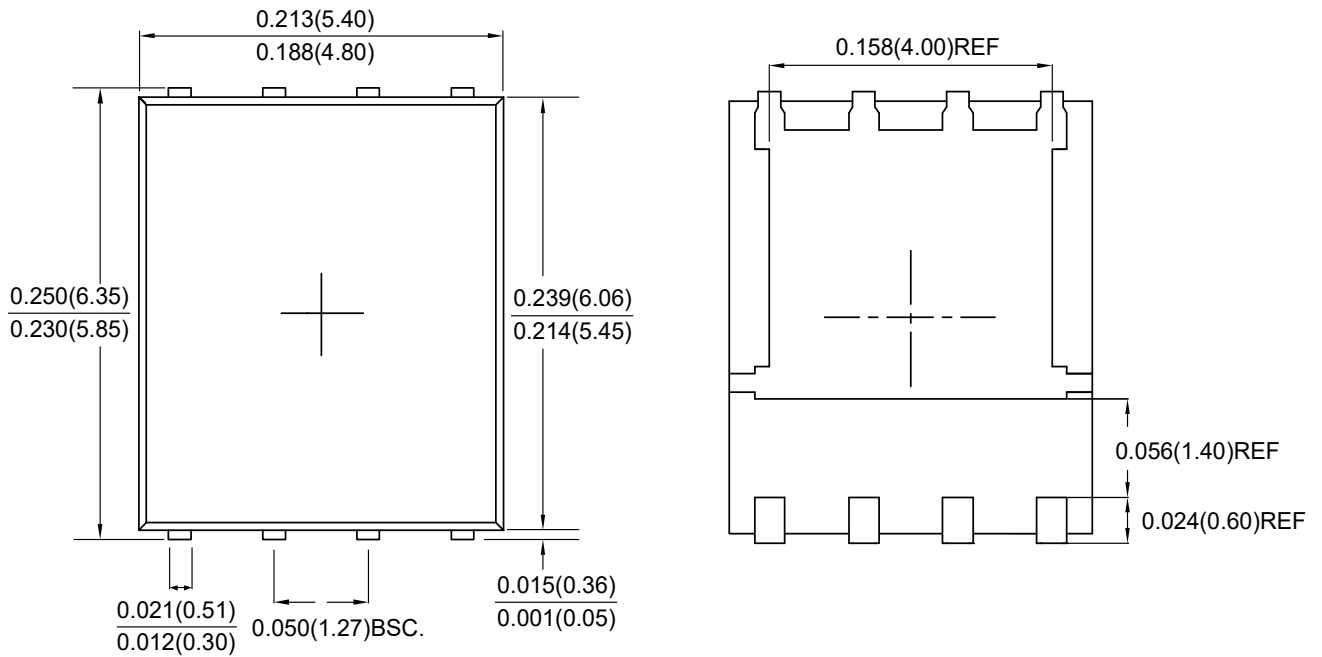

PPAK5X6

Dimensions in inches and (millimeters)



LEGAL DISCLAIMER

- The product is provided “AS IS” without any guarantees or warranty. In association with the product, Eris Technology Corporation, its affiliates, and their directors, officers, employees, agents, successors and assigns (collectively, the “Eris”) makes no warranties of any kind, either express or implied, including but not limited to warranties of merchantability, fitness for a particular purpose, of title, or of non-infringement of third party rights.
- The information in this document and any product described herein are subject to change without notice and should not be construed as a commitment by Eris. Eris assumes no responsibility for any errors that may appear in this document.
- Eris does not assume any liability arising out of the application or use of this document or any product described herein, any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Eris and all the companies whose products are represented on Eris website, harmless against all damages.
- No license, express or implied, by estoppels or otherwise, to any intellectual property is granted by this document or by any conduct of Eris. Product name and markings notes herein may be trademarks of their respective owners.
- Eris does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
- Should Customers purchase or use Eris products for any unintended or unauthorized application, Customers shall indemnify and hold Eris and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.
- The official text is written in English and the English version of this document is the only version endorsed by Eris. Any discrepancies or differences created in the translations are not binding and have no legal effect on Eris for compliance or enforcement purposes.