



Specification For Approval

承認書

客 戶 (Customer)			
品 名 (Product Name)	ECM		
機 種 (Model No.)			
客戶料號 (Customer Parts No.)			
供應商料號 (Supplier Model No.)	PVM6027NB-DC443S		
客戶承認簽章 Customer Approval Signature	In Charge	Checked	Approval

Revision History

Version	Date	Description	Author
V 001	2012.09.12	Creation	VIVIAN

紘立企業有限公司 E-mail: vecot@veco.com.tw

Vanson Enterprise Co., Ltd. Tel: +886-2-2267 2389 Fax: +886-2-2267 2588

佛山鉅利電子有限公司 E-mail: vecof@vanson.net Office: fs_sales@veco.com.cn

Vanson Electronics(Nanhai)Co., Ltd. Tel: +86-757-8853 6828 Fax: +86-757-8853 6826

鴻立電子上海有限公司 E-mail: vesf@shtel.net.cn Office: vesi@shtel.net.cn

Vanson Electronics Shanghai Inc. Tel: +86-21-5958 5999 Fax: +86-21-5958 5678

合肥宏立電子有限公司 E-mail: reception@veco-hf.com

HeFei Vanson Electronics Inc. Tel: +86-551-568 9589 Fax: +86-551-568 9593

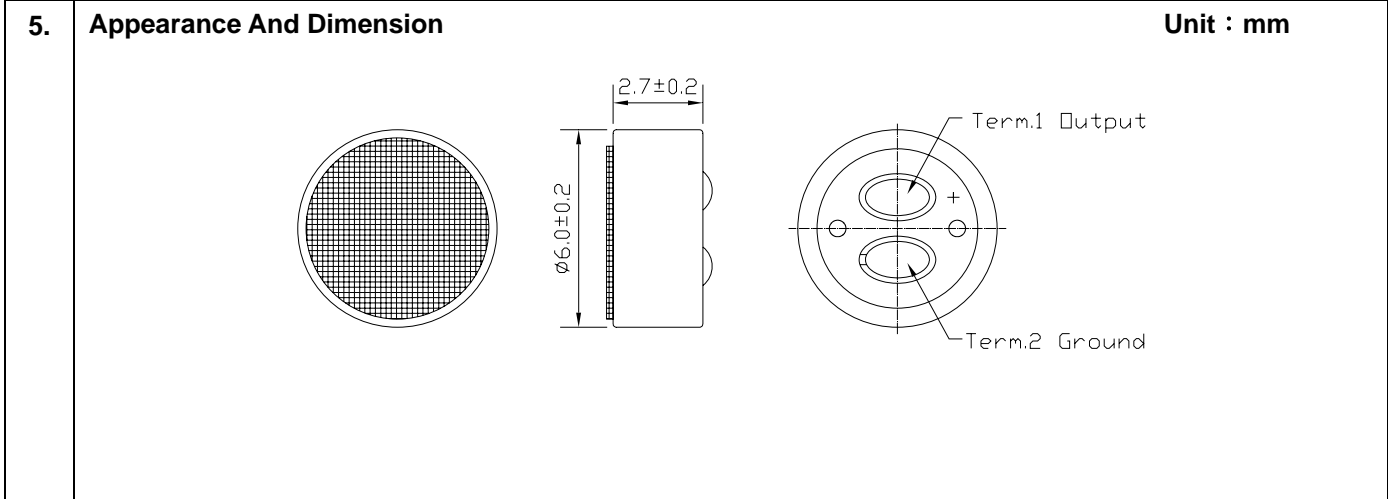
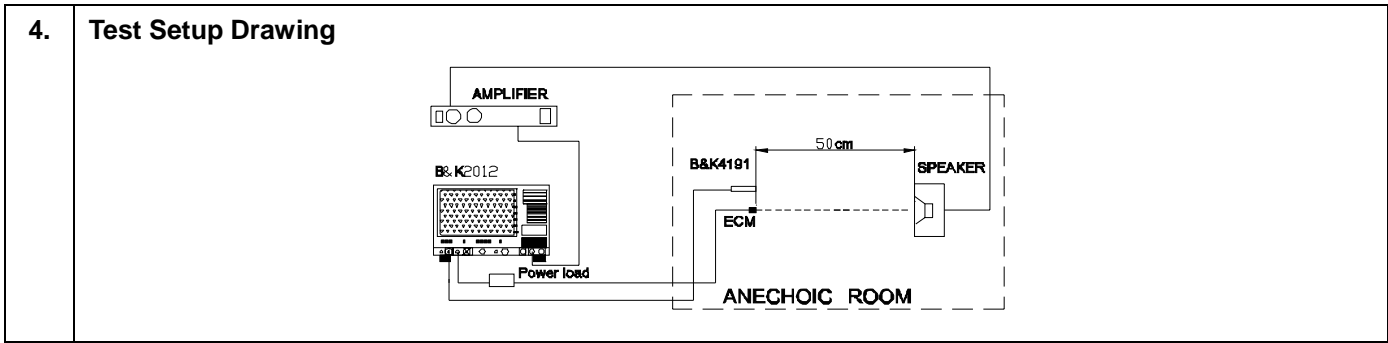
Design : VIVIAN Checked : VIVIAN Approval : VIVIAN

VECO VANSONIC ENTERPRISE CO., LTD.

3F., No. 123, Zhongcheng Rd., Tucheng Dist., New Taipei City, Taiwan.

E-mail: vecot@veco.com.tw <http://www.veco.com.tw>
 TEL: +886-2-2267 2389 FAX: +886-2-2267 2588

1.	Name :	Noise Cancelling Back Electret Condenser Microphone																														
2.	Model No.	PVM6027NB-DC443S	C1=10PF	C1=33PF																												
	Scope :	This specification applies back electret condenser microphone (Temp=20±2°C Room Humidity=65±5%)																														
	No	Parameter	Symbol	Condition	Limits			Unit																								
					Min.	Center	Max.																									
	3.1	Sensitivity	S	0dB=1V/Pa · at 1kHz	-47	-44	-41	dB																								
3.	3.2	Output impedance	Z out	f=1kHz			2.2	KΩ																								
	3.3	Current Consumption	I _{DSS}	V _{CC} =3.0V, R _L =2.2KΩ			500	μA																								
	3.4	Signal to Noise Ratio	S/N	at 1kHz S.P.L=1Pa (A-Weighted Curve)	50			dB																								
	3.5	Decreasing Voltage	ΔS	V _{CC} =3.0V to 2.0V			-3	dB																								
	3.6	Operating Voltage			1.0		10	V																								
	3.7	Maximum input S.P.L					110	dB																								
	3.8	Typical Frequency Response Curve																														
	Frequency Response (L=50CM)				Microphone Response Tolerance Window																											
					<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Frequency (Hz)</th> <th>Lower Limit (dB)</th> <th>Upper Limit (dB)</th> </tr> </thead> <tbody> <tr><td>200</td><td>-18</td><td>-10</td></tr> <tr><td>800</td><td>-6</td><td>+2</td></tr> <tr><td>1000</td><td>0</td><td>0</td></tr> <tr><td>1200</td><td>-4</td><td>+4</td></tr> <tr><td>3000</td><td>+2</td><td>+18</td></tr> <tr><td>5000</td><td>+2</td><td>+18</td></tr> <tr><td>10000</td><td>+2</td><td>+18</td></tr> </tbody> </table>				Frequency (Hz)	Lower Limit (dB)	Upper Limit (dB)	200	-18	-10	800	-6	+2	1000	0	0	1200	-4	+4	3000	+2	+18	5000	+2	+18	10000	+2	+18
Frequency (Hz)	Lower Limit (dB)	Upper Limit (dB)																														
200	-18	-10																														
800	-6	+2																														
1000	0	0																														
1200	-4	+4																														
3000	+2	+18																														
5000	+2	+18																														
10000	+2	+18																														
3.9	Measurement Circuit																															
							R _L =2.2KΩ																									
							V _s =3.0V																									
							C1=10PF																									
							C2=33PF																									
							C=1μF																									



6. Drawing

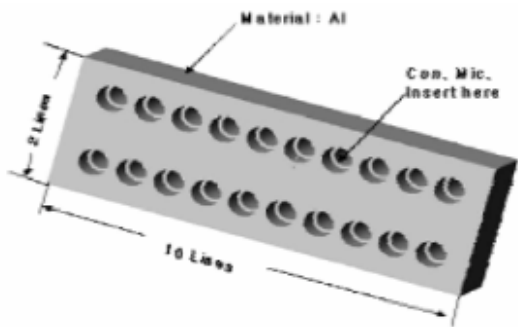
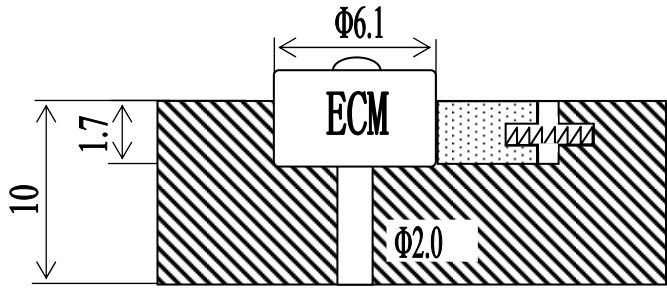
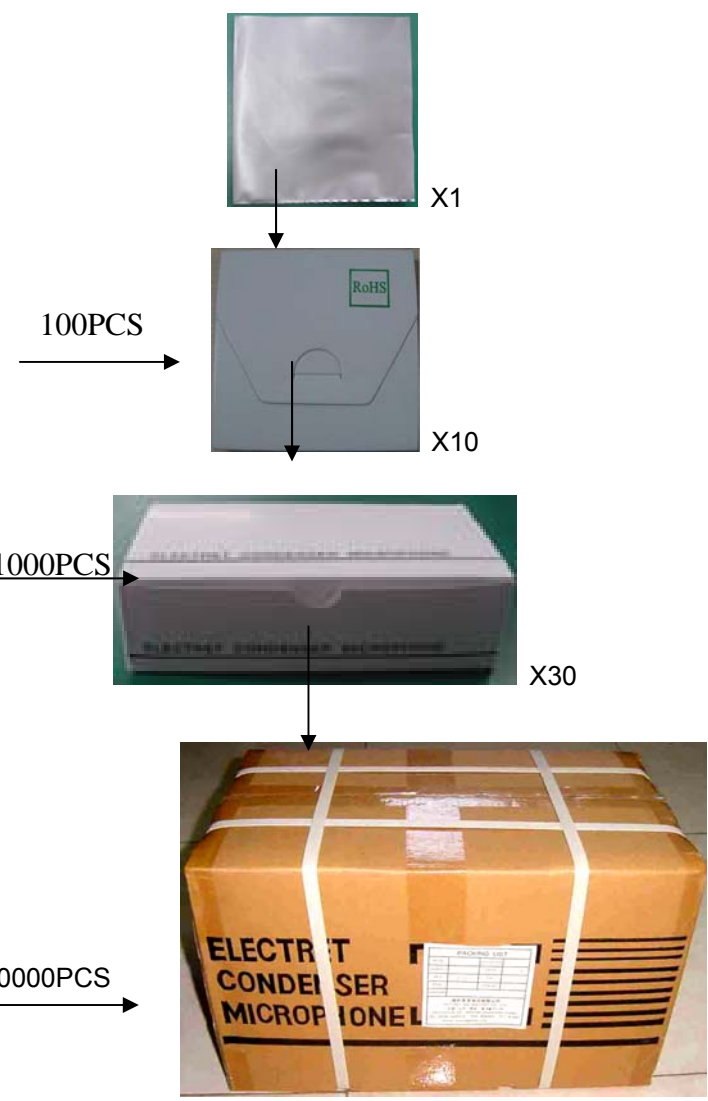
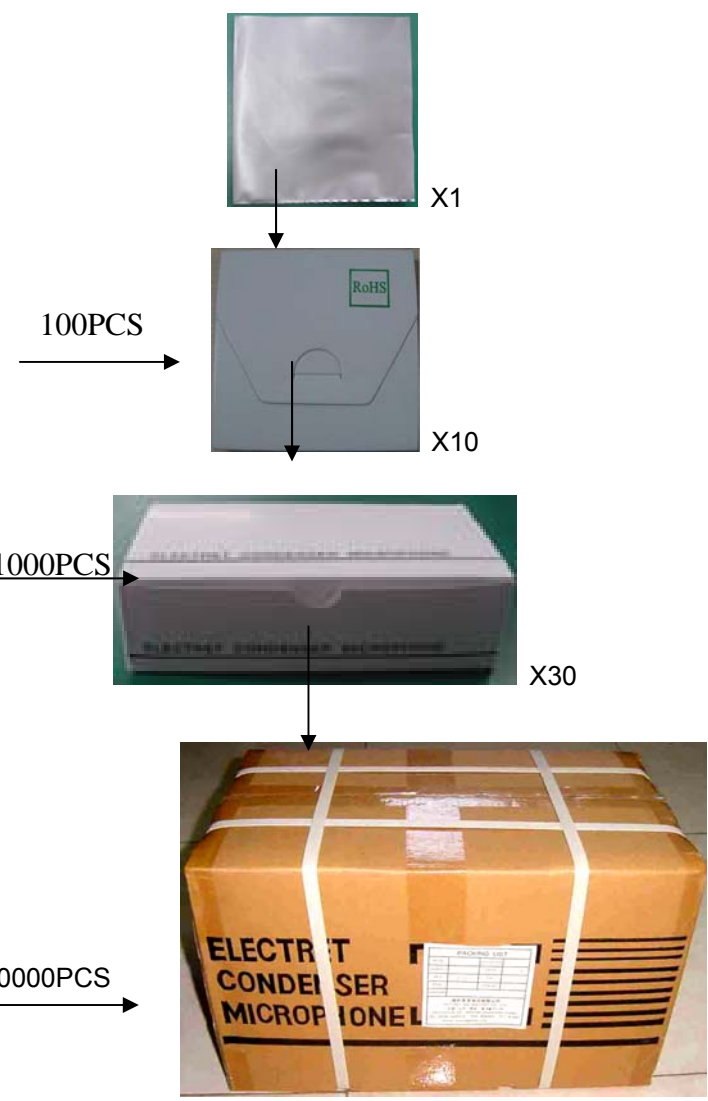
10	Capacitor	10PF+33PF	1	
9	FET		1	
8	PCB		1	
7	Copper ring		1	
6	Chamber		1	
5	Electret Plate		1	
4	Spacer		1	
3	Diaphragm		1	
2	Case	Al-Mg alloy	1	
1	Dustproof gauze		1	
No.	Name	material	QTY	Remark

7. Temperature Conditions

Storage Temperature Range	Operation Temperature Range
-40°C ~ +85°C	-40°C ~ +85°C

8. Terminal Mechanical Strength
 Terminal mechanical strength to be no interference in operation after pulled the terminal with 1kg strength for 1 minute.

<p>9.</p>	<p>Reliability Test</p> <p>After each of following test, the sensitivity of the microphone should be within $\pm 3\text{dB}$ of initial sensitivity after 3hours of conditioning at 20°C.</p> <p>1. Vibration Test</p> <p>Frequency : 10Hz~55Hz Amplitude : 1.52mm Change of Frequency : 1 octave/min 2 hours in each of axes</p> <p>2. High Temperature Test $+85^{\circ}\text{C}$ for 240 hours.</p> <p>3. Low Temperature Test -40°C for 240 hours.</p> <p>4. Humidity Test 90%~95%RH,$+60^{\circ}\text{C}$ for 240 hours.</p> <p>5. Thermal shocking test -40°C, 30 minutes \leftrightarrow $+80^{\circ}\text{C}$, 30 minutes, repeated 32 cycles \rightarrow room temperature, 3 hours.</p> <p>6. Temperature Cycles -40°C \leftrightarrow $+20^{\circ}\text{C}$ \leftrightarrow $+85^{\circ}\text{C}$ \leftrightarrow $+20^{\circ}\text{C}$ \leftrightarrow -40°C (2h) (0.5h) (2h) (0.1h) (2h) (0.5h) (2h) (0.5h) (2h) for 5 cycles.</p> <p>7. Packing Drop Test Height : 1.5m Procedure: 5 times from each of axes</p> <p>8. Electrostatic discharge Tested to IEC61000-4-2 level 3 :</p> <p>a) Contact discharge The microphone shall operate normally after 10 discharges to is 6KV DC and the discharge network is 150pF and 330Ω.</p> <p>b) Air discharge The microphone shall operate normally after 10 discharges to is 8KV DC and the discharge network is 150pF and 330Ω</p>
<p>10.</p>	<p>Soldering Condition</p> <p>1. We suggest using anti-static welding machine which can control soldering temperature automatically.</p> <p>2. Soldering temperature should be controlled under 320°C and soldering time for each terminal should be 1~2 sec..</p> <p>3. Microphone should be fixed on the metal block (heat sink), which has high radiation effects, and heat sink shall contact with MIC tightly.</p> <p>4. Microphone may easily be destroyed by the static electricity and the countermeasure for eliminating the static electricity shall be executed (worktable and human body shall be ground connection).</p>

<p>10.</p>	<p>5. Shape of heat sink</p> 				
	<p>Shape of hole at fixed part</p> 				
<p>11.</p>	<table border="1"> <thead> <tr> <th data-bbox="204 846 762 896">Packing Introduction</th> <th data-bbox="762 846 1524 896">Packing chart</th> </tr> </thead> <tbody> <tr> <td data-bbox="204 896 762 2049"> <p>DIMENSION:(LENGTH*WIDTH *HEIGHT)</p> <p>a) AVOID STATIC SPONGE: 80mm*80mm*2mm</p> <p>b) SMALL PACKET 85mm*85mm*10mm</p> <p>c) MID PACKET: 175mm*85mm*50mm</p> <p>d) PAPER CASE: 550mm*230mm*235mm</p> <p>EQUIPMENT</p> <p>e) ADHENSIVE TAPE MACHINE</p> <p>f) AUTO PACKER</p> <p>PACKING INTRODUCTION</p> <p>g) 100PCS/ SMALL PACKET</p> <p>h) 1000PCS/MID PACKET</p> <p>i) 30000PCS/PAPER CASE</p> <p>QUANTITY INTRODUCTION</p> <p>j) 1PC=0.23 g</p> <p>k) NET WEIGHT : 6.9 kg GROSS WEIGHT : 9.9 kg</p> <p>LABEL STIPULATION</p> <p>a) LABEL EDEVERY BOXES (SEE THE CHART)</p> <p>DIMENSIONSSHOULDBESEENEASILY.</p> </td> <td data-bbox="762 896 1524 2049">  </td> </tr> </tbody> </table>	Packing Introduction	Packing chart	<p>DIMENSION:(LENGTH*WIDTH *HEIGHT)</p> <p>a) AVOID STATIC SPONGE: 80mm*80mm*2mm</p> <p>b) SMALL PACKET 85mm*85mm*10mm</p> <p>c) MID PACKET: 175mm*85mm*50mm</p> <p>d) PAPER CASE: 550mm*230mm*235mm</p> <p>EQUIPMENT</p> <p>e) ADHENSIVE TAPE MACHINE</p> <p>f) AUTO PACKER</p> <p>PACKING INTRODUCTION</p> <p>g) 100PCS/ SMALL PACKET</p> <p>h) 1000PCS/MID PACKET</p> <p>i) 30000PCS/PAPER CASE</p> <p>QUANTITY INTRODUCTION</p> <p>j) 1PC=0.23 g</p> <p>k) NET WEIGHT : 6.9 kg GROSS WEIGHT : 9.9 kg</p> <p>LABEL STIPULATION</p> <p>a) LABEL EDEVERY BOXES (SEE THE CHART)</p> <p>DIMENSIONSSHOULDBESEENEASILY.</p>	
Packing Introduction	Packing chart				
<p>DIMENSION:(LENGTH*WIDTH *HEIGHT)</p> <p>a) AVOID STATIC SPONGE: 80mm*80mm*2mm</p> <p>b) SMALL PACKET 85mm*85mm*10mm</p> <p>c) MID PACKET: 175mm*85mm*50mm</p> <p>d) PAPER CASE: 550mm*230mm*235mm</p> <p>EQUIPMENT</p> <p>e) ADHENSIVE TAPE MACHINE</p> <p>f) AUTO PACKER</p> <p>PACKING INTRODUCTION</p> <p>g) 100PCS/ SMALL PACKET</p> <p>h) 1000PCS/MID PACKET</p> <p>i) 30000PCS/PAPER CASE</p> <p>QUANTITY INTRODUCTION</p> <p>j) 1PC=0.23 g</p> <p>k) NET WEIGHT : 6.9 kg GROSS WEIGHT : 9.9 kg</p> <p>LABEL STIPULATION</p> <p>a) LABEL EDEVERY BOXES (SEE THE CHART)</p> <p>DIMENSIONSSHOULDBESEENEASILY.</p>	