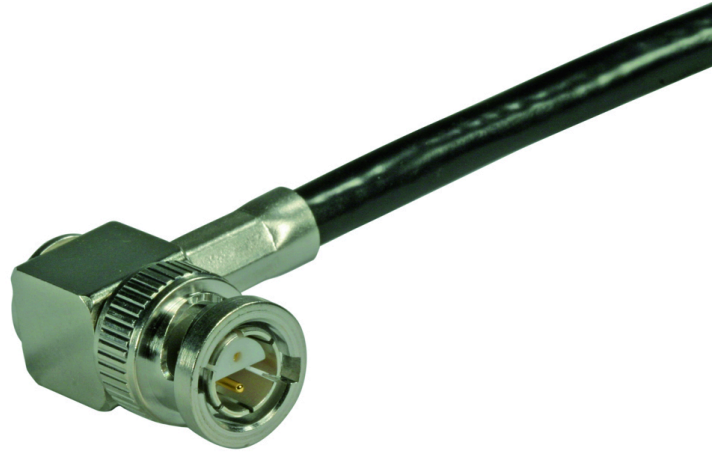


COAXIAL CONNECTOR, BNO, X Ohm, Right angle cable plug (male)

16_BNO-0-4-1/133_N

Properties

- Used with balanced twin-conductor cables with 75 ohm to 130 ohm impedance
- Suitable for applications up to 200 MHz
- Ideal for computer networks and process control

**Product configuration**

Gender	Standard
plug	IEC 60169-22

Interface and material data

Piece parts	Material	Plating
Centre contact	Copper Beryllium / Brass	Gold Plating (Nickel underplated)
Outer conductor	Brass	SUCOPLATE (R) Plating
Body	Brass	SUCOPLATE (R) Plating
Insulator	PFA / PTFE	
Coupling nut	Brass	SUCOPLATE (R) Plating
Gasket	VMQ (Silicone rubber)	
Crimp ferrule	Copper	SUCOPLATE (R) Plating

Electrical data

Interface frequency	0.2 GHz
---------------------	---------

Mechanical data

Weight	0.0216 kg
Mating cycles	500
Cable entry centre contact	soldered
Cable entry outer contact	crimped

Environmental data

Operation temperature	-50 °C ... 125°C
-----------------------	------------------

COAXIAL CONNECTOR, BNO, X Ohm, Right angle cable plug (male)

16_BNO-0-4-1/133_N

Ordering Information Table		
Item number	Item description	Packaging type
22643456	16_BNO-0-4-1/133_NE	Single

Suitable cables	
Cable group	V1 - 2 mm / 78 Ohm
Suitable cables	RG_108_A/U

Additional Information	
Only as assembly	No

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P3145 / Date of publication: 25.11.2023 / uncontrolled copy