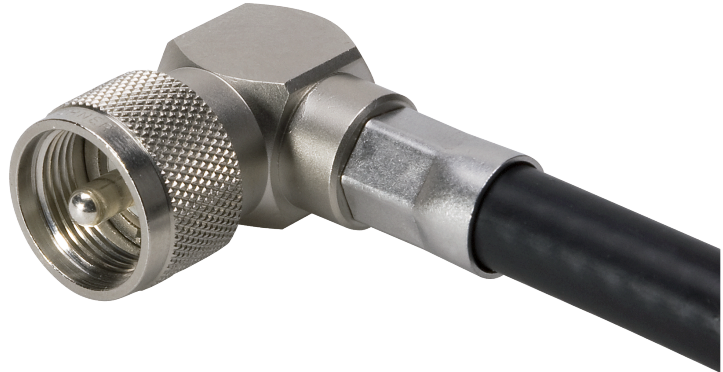


COAXIAL CONNECTOR, UHF, X Ohm, Right angle cable plug (male)

16_UHF-0-7-4/02-_-

Properties

- Mateable with 4 mm banana plugs
- Applicable in frequencies up to 200 MHz

**Product configuration**

Interface type	Gender	Standard
UHF	plug	IEC 60169-12

Interface and material data

Piece parts	Material	Plating
Centre contact	Brass	Silver Plating
Outer conductor	Brass	Nickel Plating
Body	Brass	Nickel Plating
Insulator	PFA / PTFE	
Coupling nut	Brass	Nickel Plating
Crimp ferrule	Copper	SUCOPLATE (R) Plating

Electrical data

Interface frequency	0.2 GHz
---------------------	---------

Mechanical data

Weight	0.0548 kg
Mating cycles	500
Cable entry centre contact	soldered
Cable entry outer contact	crimped

Environmental data

Operation temperature	-55 °C ... 165°C
-----------------------	------------------

COAXIAL CONNECTOR, UHF, X Ohm, Right angle cable plug (male)

16_UHF-0-7-4/02-_-

Ordering Information Table		
Item number	Item description	Packaging type
22542766	16_UHF-0-7-4/022_E	Single

Suitable cables	
Cable group	U42 - 7 mm / 50 Ohm
	U29 - 7 mm / 50 Ohm
Suitable cables	RG_213_/U
	GX_07272
Additional cables	G_07272
	RADOX_RF_213

Additional Information	
Only as assembly	No

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P2956 / Date of publication: 25.11.2023 / uncontrolled copy