


**COAXIAL CONNECTOR, SK, 50 Ohm, Straight cable jack (female)**

21\_SK-U50-1-3/119\_N

**Properties**

- The shortened male pin ensures a non-destructive mating process
- Particularly well suited for semi-rigid, semi-flex and flexible cable
- Mechanical intermateable with SMA and PC 3.5 (3.5 mm standard)

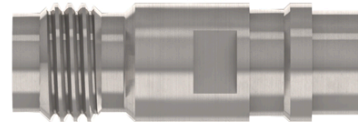

Product configuration		
Interface type	Gender	Standard
SK	jack	MIL-STD-348A/323
Interface and material data		
Piece parts	Material	Plating
Centre contact	Copper Beryllium Alloy	SUCOPRO / Gold Plating
Outer conductor	Brass	SUCOPRO / Gold Plating
Body	Brass	SUCOPRO / Gold Plating
Other body part	Aluminium	Anodized
Insulator	PTFE (Polytetrafluoroethylene)	
Electrical data		
Impedance	50 Ω	
Interface frequency	40 GHz	
Mechanical data		
Mating cycles	500	
Cable entry centre contact	plugged	
Cable entry outer contact	soldered	
Environmental data		
Operation temperature	-55 °C ... 125°C	
Ordering Information Table		
Item number	Item description	Packaging type
84093902	21_SK-U50-1-3/119_NH	Bulk 100 pcs

**COAXIAL CONNECTOR, SK, 50 Ohm, Straight cable jack (female)**

21\_SK-U50-1-3/119\_N

<b>Suitable cables</b>	
Cable group	Y18 - 1 mm / 50 Ohm
Suitable cables	MULTIFLEX_53-02

<b>Additional Information</b>	
Only as assembly	No

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.  
DOCUMENT PIM-P2859 / Date of publication: 25.11.2023 / uncontrolled copy