


COAXIAL CONNECTOR, TNC, 50 Ohm, Straight cable jack (female)

21_TNC-50-3-4/133_N

Properties

- Threaded coupling mechanism improves control over the interface dimensions
- Used under a higher environmental load than BNC
- Available for 50 ohm and 75 ohm applications
- Applicable in frequencies up to 11 GHz

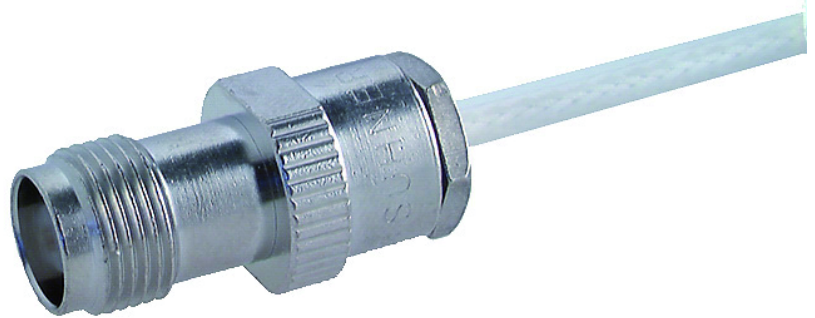

Product configuration		
Interface type	Gender	Standard
TNC	jack	IEC 60169-17_MIL-STD-348A/313_CECC 22200
Interface and material data		
Piece parts	Material	Plating
Centre contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Outer conductor	Brass	SUCOPLATE (R) Plating
Body	Brass	SUCOPLATE (R) Plating
Insulator	PFA / PTFE	
Gasket	VMQ (Silicone rubber)	
Washer	PFA / PTFE	
Electrical data		
Impedance	50 Ω	
Interface frequency	11 GHz	
Mechanical data		
Weight	0.0153 kg	
Mating cycles	500	
Cable entry centre contact	soldered	
Cable entry outer contact	clamped	
Environmental data		
Operation temperature	-65 °C ... 165 °C	

COAXIAL CONNECTOR, TNC, 50 Ohm, Straight cable jack (female)

21_TNC-50-3-4/133_N

Ordering Information Table		
Item number	Item description	Packaging type
22640523	21_TNC-50-3-4/133_NE	Single
84018747	21_TNC-50-3-4/133_NH	Bulk 100 pcs

Suitable cables	
Cable group	X25 - 3 mm / 50 Ohm
	U9 - 3 mm / 50 Ohm
	U7 - 3 mm / 50 Ohm
	U11 - 3 mm / 50 Ohm
Suitable cables	RG_58_C/U
	RG_223_/U
	ENVIROFLEX_142
Additional cables	RG_400_/U
	ASNE0293 XF

Additional Information	
Only as assembly	No

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P2834 / Date of publication: 25.11.2023 / uncontrolled copy