


COAXIAL CONNECTOR, BNC, 50 Ohm, Straight cable jack (female)

21_BNC-50-2-9/133_N

Properties

- Useful for frequently coupled and uncoupled connections
- Available for 50 ohm and 75 ohm applications
- Applicable in frequencies up to 4 GHz

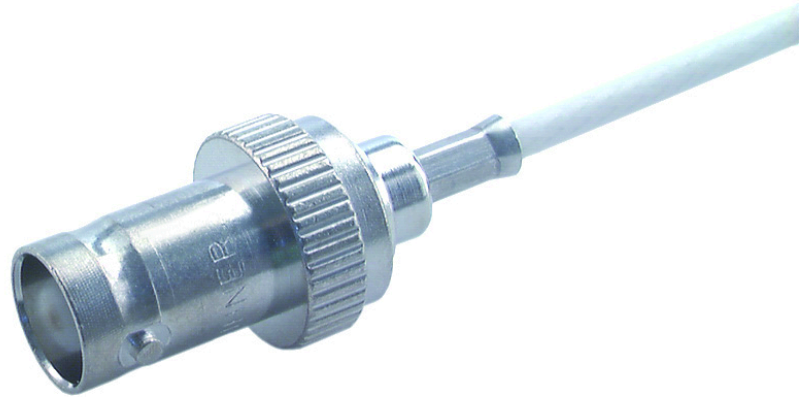

| Product configuration | | |
|-----------------------------|--------------------------|---|
| Interface type | Gender | Standard |
| BNC | jack | IEC 60169-8_MIL-STD-348A/301_CECC 22120 |
| Interface and material data | | |
| Piece parts | Material | Plating |
| Centre contact | Copper Beryllium / Brass | Gold Plating (Nickel underplated) |
| Outer conductor | Brass | SUCOPLATE (R) Plating |
| Body | Brass | SUCOPLATE (R) Plating |
| Insulator | PFA / PTFE | |
| Crimp ferrule | Copper | SUCOPLATE (R) Plating |
| Electrical data | | |
| Impedance | 50 Ω | |
| Interface frequency | 4 GHz | |
| Mechanical data | | |
| Weight | 0.0132 kg | |
| Mating cycles | 500 | |
| Cable entry centre contact | crimped | |
| Cable entry outer contact | crimped | |
| Environmental data | | |
| Operation temperature | -65 °C ... 165°C | |

COAXIAL CONNECTOR, BNC, 50 Ohm, Straight cable jack (female)

21_BNC-50-2-9/133_N

| Ordering Information Table | | |
|-----------------------------------|----------------------|----------------|
| Item number | Item description | Packaging type |
| 22641732 | 21_BNC-50-2-9/133_NE | Single |

| Suitable cables | |
|------------------------|--------------------|
| Cable group | U2 - 2 mm / 50 Ohm |
| Suitable cables | RG_316_/U |
| | RG_188_A/U |
| Additional cables | RG_174_/U |

| Additional Information | |
|-------------------------------|----|
| Only as assembly | No |

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P2923 / Date of publication: 25.11.2023 / uncontrolled copy