


COAXIAL CONNECTOR, MCX, 50 Ohm, Straight cable jack (female)

21_MCX-50-2-12/111_N

Properties

- Small size
- Easy to connect and disconnect
- Wide range of board connectors and cable connectors available

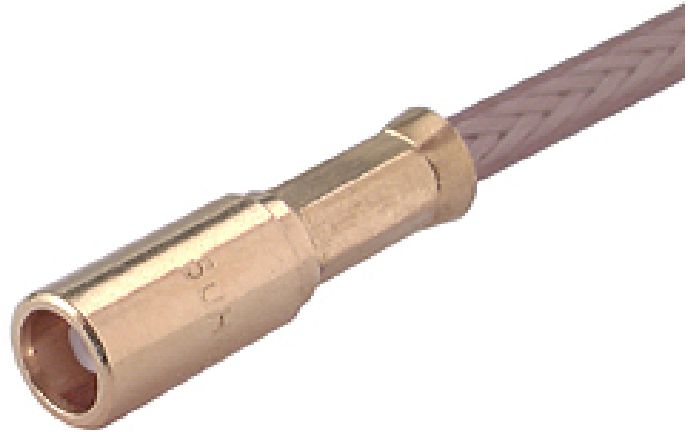

Product configuration		
Interface type	Gender	Standard
MCX	jack	IEC 60169-36_CECC 22220
Interface and material data		
Piece parts	Material	Plating
Centre contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Outer conductor	Brass	SUCOPRO Plating
Body	Brass	SUCOPRO Plating
Insulator	PFA / PTFE	
Crimp ferrule	Copper	SUCOPRO Plating
Electrical data		
Impedance	50 Ω	
Interface frequency	6 GHz	
Mechanical data		
Weight	0.0013 kg	
Mating cycles	500	
Cable entry centre contact	crimped	
Cable entry outer contact	crimped	
Environmental data		
Operation temperature	-65 °C ... 165°C	

COAXIAL CONNECTOR, MCX, 50 Ohm, Straight cable jack (female)

21_MCX-50-2-12/111_N

Ordering Information Table		
Item number	Item description	Packaging type
23032052	21_MCX-50-2-12/111_NE	Single

Suitable cables	
Cable group	U4 - 2 mm / 50 Ohm
Suitable cables	ENVIROFLEX_316_D
	G_02232_D
	K_02252_D

Additional Information	
Only as assembly	No

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P2909 / Date of publication: 25.11.2023 / uncontrolled copy