


COAXIAL CONNECTOR, SMB, 50 Ohm, Straight bulkhead cable jack (female)

24_SMB-50-2-110/133_N

Properties

- Snap-on mechanism provides a fast and reliable connection
- Ideal for applications with high packaging density
- Applicable in frequencies up to 4 GHz

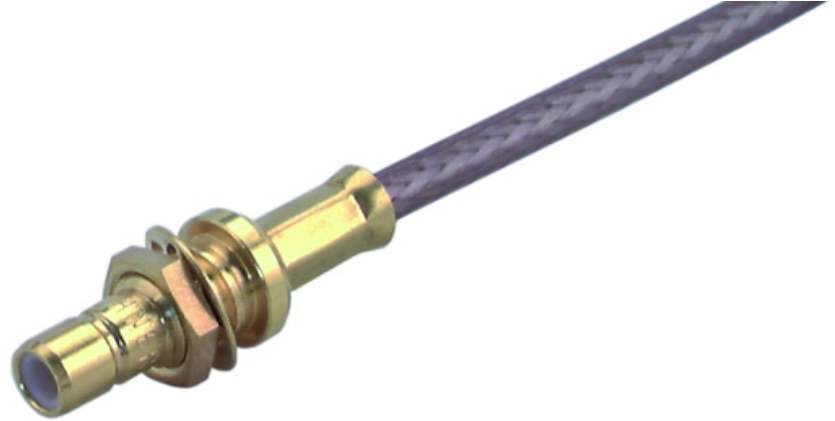

Product configuration

Interface type	Gender	Standard
SMB	jack	IEC 60169-10_MIL-STD-348A/311_CECC 22130

Interface and material data

Piece parts	Material	Plating
Centre contact	Brass	Gold Plating (Nickel underplated)
Outer conductor	Brass	SUCOPLATE (R) Plating
Body	Brass	SUCOPLATE (R) Plating
Insulator	PFA / PTFE / PSU	
Fastening nut	Brass	SUCOPLATE (R) Plating
Washer	Bronze	SUCOPLATE (R) Plating
Crimp ferrule	Copper	SUCOPLATE (R) Plating

Electrical data

Impedance	50 Ω
Interface frequency	4 GHz

Electrical Data (frequency related)

Frequency range	Return loss	VSWR
0 GHz ... 1 GHz	29 dB	1.07
1 GHz ... 2 GHz	25 dB	1.12

Mechanical data

Weight	0.0017 kg
Mating cycles	500
Cable entry centre contact	crimped
Cable entry outer contact	crimped

COAXIAL CONNECTOR, SMB, 50 Ohm, Straight bulkhead cable jack (female)
24_SMB-50-2-110/133_N

Environmental data	
Operation temperature	-65 °C ... 165°C

Ordering Information Table		
Item number	Item description	Packaging type
22659128	24_SMB-50-2-110/133_NH	Bulk 100 pcs

Suitable cables	
Cable group	U2 - 2 mm / 50 Ohm
Suitable cables	RG_188_A/U
	RG_316_/U
Additional cables	RG_174_/U

Additional Information	
Only as assembly	No

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P2556 / Date of publication: 25.11.2023 / uncontrolled copy