


COAXIAL CONNECTOR, 7/16, 50 Ohm, Straight cable plug (male)

11_716-50-4-5/033_-

Properties

- Rugged connection for COM-Applications
- For medium and high power connection
- Applicable in frequencies up to 7.5 GHz
- IEC Standardized

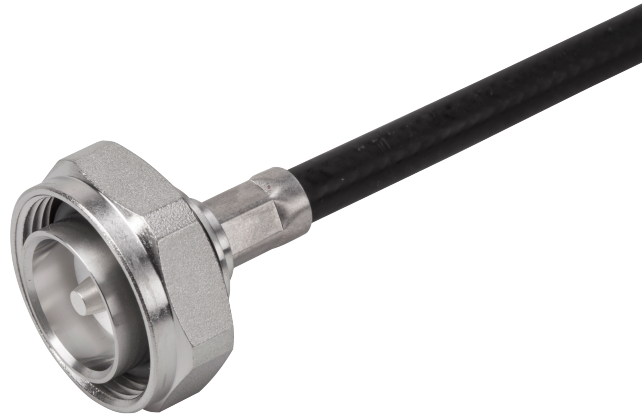

Product configuration		
Interface type	Gender	Standard
7/16	plug	IEC 61169-4_CECC 22190_DIN 47223_VG 95250

Interface and material data		
Piece parts	Material	Plating
Centre contact	Bronze	Silver Plating
Outer conductor	Brass	SUCOPLATE (R) Plating
Body	Brass	SUCOPLATE (R) Plating
Insulator	PTFE (Polytetrafluoroethylene)	
Coupling nut	Brass	SUCOPLATE (R) Plating
Gasket	VMQ (Silicone rubber)	
Crimp ferrule	Copper	SUCOPLATE (R) Plating

Electrical data	
Impedance	50 Ω
Interface frequency	7.5 GHz

Electrical Data (frequency related)		
Frequency range	Return loss	VSWR
0.1 GHz ... 2 GHz	28.2 dB	1.081
2 GHz ... 4 GHz	24.5 dB	1.127
4 GHz ... 6 GHz	20.5 dB	1.208

Mechanical data	
Weight	0.074468 kg
Mating cycles	500
Cable entry centre contact	plugged

COAXIAL CONNECTOR, 7/16, 50 Ohm, Straight cable plug (male)

11_716-50-4-5/033_-

Mechanical data	
Cable entry outer contact	crimped

Environmental data	
Operation temperature	-65 °C ... 165°C
Ingress protection (IP Rating)	Mated / IP67

Ordering Information Table		
Item number	Item description	Packaging type
84098543	11_716-50-4-5/033_-Y	Tray

Suitable cables	
Cable group	X9 - 4 mm / 50 Ohm X28 - 4 mm / 50 Ohm
Suitable cables	SX_04172_B-60 SPUMA_240
Additional cables	LMR-240

Additional Information	
Only as assembly	No

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P3724 / Date of publication: 25.11.2023 / uncontrolled copy