


COAXIAL CONNECTOR, SMA-26.5GHz, 50 Ohm, Straight cable plug (male)

11_SMA-50-3-42/-33_N

Properties

- Excellent return loss
- Intermateable with PC3.5 and SK
- Applicable in frequencies up to 18 GHz

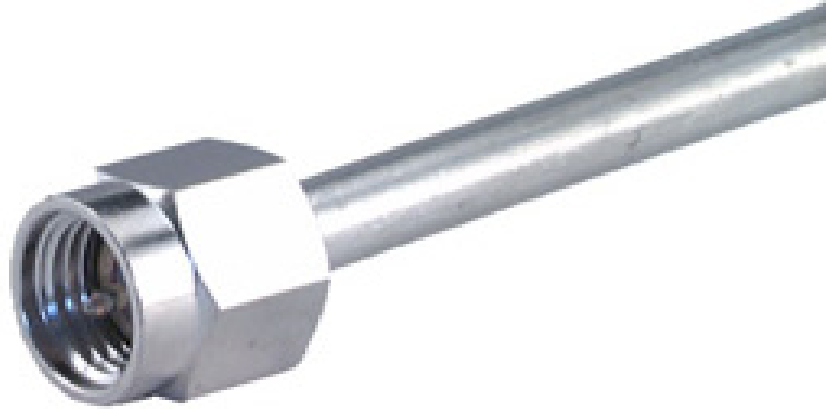

Product configuration		
Interface type	Gender	Standard
SMA-26.5GHz	plug	HUBER+SUHNER-SMA-26.5GHz
Interface and material data		
Piece parts	Material	Plating
Outer conductor	Brass	SUCOPLATE (R) Plating
Body	Brass	SUCOPLATE (R) Plating
Coupling nut	Brass	SUCOPLATE (R) Plating
Gasket	VMQ (Silicone rubber)	
Electrical data		
Impedance	50 Ω	
Interface frequency	26.5 GHz	
Mechanical data		
Weight	0.0033 kg	
Mating cycles	500	
Cable entry centre contact	soldered	
Cable entry outer contact	soldered	
Environmental data		
Operation temperature	-65 °C ... 165°C	
Ordering Information Table		
Item number	Item description	Packaging type
22649222	11_SMA-50-3-42/-33_NE	Single

COAXIAL CONNECTOR, SMA-26.5GHz, 50 Ohm, Straight cable plug (male)

11_SMA-50-3-42/-33_N

Suitable cables	
Cable group	Y5 - 3 mm / 50 Ohm

Additional Information	
Remarks	El. Optimized for cable RG 58 C/U
Only as assembly	No

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P3458 / Date of publication: 25.11.2023 / uncontrolled copy