


COAXIAL CONNECTOR, SMA-26.5GHz, 50 Ohm, Straight cable plug (male)

11_SMA-50-3-66/-19_N

Properties

- Excellent return loss
- Intermateable with PC3.5 and SK
- Applicable in frequencies up to 18 GHz

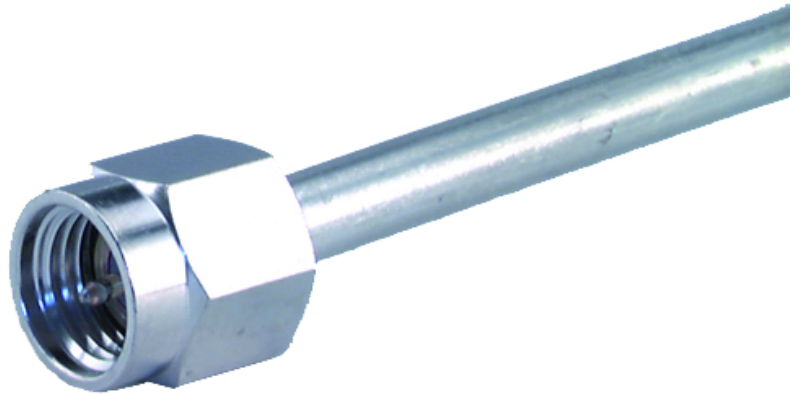

Product configuration		
Interface type	Gender	Standard
SMA-26.5GHz	plug	HUBER+SUHNER-SMA-26.5GHz
Interface and material data		
Piece parts	Material	Plating
Outer conductor	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Body	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Coupling nut	Stainless Steel	
Gasket	VMQ (Silicone rubber)	
Electrical data		
Impedance	50 Ω	
Interface frequency	26.5 GHz	
Mechanical data		
Weight	0.0023 kg	
Mating cycles	500	
Cable entry outer contact	soldered	
Environmental data		
Operation temperature	-65 °C ... 165°C	
Ordering Information Table		
Item number	Item description	Packaging type
22641644	11_SMA-50-3-66/-19_NE	Single
22645207	11_SMA-50-3-66/-19_NH	Bulk 100 pcs

COAXIAL CONNECTOR, SMA-26.5GHz, 50 Ohm, Straight cable plug (male)

11_SMA-50-3-66/-19_N

Suitable cables

Cable group	Y5 - 3 mm / 50 Ohm
-------------	--------------------

Additional Information

Only as assembly	No
------------------	----

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P3449 / Date of publication: 25.11.2023 / uncontrolled copy