


COAXIAL CONNECTOR, TNC, 50 Ohm, Straight cable plug (male)

11_TNC-50-3-34

Properties

- Threaded coupling mechanism improves control over the interface dimensions
- Used under a higher environmental load than BNC
- Available for 50 ohm and 75 ohm applications
- Applicable in frequencies up to 11 GHz

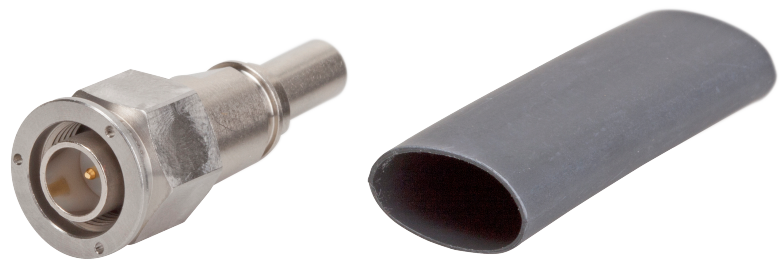

Product configuration		
Interface type	Gender	Standard
TNC	plug	ASNE.0461.F01
Interface and material data		
Piece parts	Material	Plating
Centre contact	Brass	Gold Plating (without Nickel underplating)
Outer conductor	Brass	Nickel Plating
Body	Brass	Nickel Plating
Insulator	PFA / PTFE	
Coupling nut	Stainless Steel	Passivated (Plating)
Gasket	VMQ (Silicone rubber)	
Electrical data		
Impedance		50 Ω
Interface frequency		11 GHz
Electrical Data (frequency related)		
Frequency range	Return loss	VSWR
0 GHz ... 6 GHz	15.6 dB	1.4
Mechanical data		
Weight		0.0241 kg
Mating cycles		500
Cable entry centre contact		crimped
Cable entry outer contact		crimped

COAXIAL CONNECTOR, TNC, 50 Ohm, Straight cable plug (male)

11_TNC-50-3-34

Environmental data	
Operation temperature	-65 °C ... 165°C

Ordering Information Table			
Item number	Item description	Packaging type	Packaging information
22645874	11_TNC-50-3-34	Single	ASNE0461.F01

Suitable cables	
Cable group	U99 - Customer specific
Suitable cables	RG_400_/U
Additional cables	ASNE0293 XF

Additional Information	
Only as assembly	No

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P3399 / Date of publication: 25.11.2023 / uncontrolled copy