

SENCITY® Rail Antenna with GNSS/LNA

1399.99.0120

Properties

- Railway rooftop antenna for 2G/3G/4G/5G cellular and Wi-Fi 4/Wi-Fi 6 bands
- Rugged design, meets EN 50155 Railway Standard
- Fire retardant according to EN 45545-2 and NFPA-130
- Embedded GNSS antenna with integrated LNA supports GPS L1, Galileo E1, BeiDou B1 and GLONASS G1
- Dedicated grounding contact and Cable conduit support (sold separately)



Electrical bands				
	Band 1	Band 2	Band 3	Band 4
Name	Cell / WiFi	Cell / WiFi	Cell / WiFi	Cell / WiFi
Frequency (MHz)	694 MHz ... 790 MHz	790 MHz ... 960 MHz	1350 MHz ... 1525 MHz	1710 MHz ... 2700 MHz
Impedance	50 Ω	50 Ω	50 Ω	50 Ω
VSWR	2	1.5	2.2	1.5
Gain (dBi)	5 dBi	5 dBi	6 dBi	6 dBi
Ambient Temperature	25 °C	25 °C	25 °C	25 °C
Composite Power max	80 W	80 W	80 W	80 W
	Band 5	Band 6	Band 7	Band 8
Name	Cell / WiFi	Cell / WiFi	Cell / WiFi	GNSS
Frequency (MHz)	2700 MHz ... 3300 MHz	3300 MHz ... 4900 MHz	4900 MHz ... 6425 MHz	1559 MHz ... 1610 MHz
Impedance	50 Ω	50 Ω	50 Ω	50 Ω
VSWR	1.5	1.7	1.5	1.8
Gain (dBi)	8.5 dBi	7 dBi	7.5 dBi	
Ambient Temperature	25 °C	25 °C	25 °C	
Composite Power max	80 W	80 W	80 W	

SENCITY® Rail Antenna with GNSS/LNA

1399.99.0120

Electrical remarks	
Remarks	Indicated VSWR values are valid for a metallic ground plane of 0.5 x 0.5m or larger. In the 790-6425 MHz band, Indicated VSWR values are also valid for installations on non-metallic surfaces (no specific ground plane requirements). Indicated gain values will be achieved on a metallic ground plane of 1 x 1 m or larger.

Ports		
Connector	N, jack (female)	TNC, plug (male)
Cable length		0.14 m
Polarization	vertical	circular right
DC grounded	Yes	No

Connections		
Port number		
Band 1	✓	
Band 2	✓	
Band 3	✓	
Band 4	✓	
Band 5	✓	
Band 6	✓	
Band 7	✓	
Band 8		✓

Mechanical data	
Weight	1 kg
Dimensions	90 mm x 100 mm x 256 mm (Height x Width x Depth)
Windload	Wind Speed survival: 500 km/h
Remarks	High-voltage-protection: no voltage on RF port, if the catenary line touches antenna (EN 50124-1, 27.5 kVAC/1min). High-current-protection: Designed acc. to UIC 533, DC-grounded antenna element protection against lightning and short circuit with catenary lines (EN50388, EN 50122-1, 40kA/0.1sec) Corrosion: Low corrosion design according to MIL-F-14072(E), 96 hours Salt Spray test. Mounting: Shall be installed in longitudinal position to the wind/driving direction. Suitable for installation on high speed trains with a maximum speed of 500 km/hr.

Interface and material data	
Radome material	PC (Polycarbonate)
Radome colour	RAL 7043 (dark grey)
Back plate/base plate material	Aluminium
Back plate/base plate plating	Passivated (Plating)
Back plate/base plate colour	Grey
Housing material and surface treatment	Grey

Environmental data	
Operation temperature	-55 °C ... 85 °C
Storage temperature	-55 °C ... 85 °C
Transport temperature	-55 °C ... 85 °C

SENCITY® Rail Antenna with GNSS/LNA

1399.99.0120

Environmental data	
Environment (application)	Outdoor
Ingress protection (IP Rating)	IP67, IP69
Flammability rating	EN 45545-2 R24 HL3
Solar radiation	UL 746C, F1
Standards	Railway EN 50155
	Railway EN 45545
	Railway NFPA130

Environmental remarks

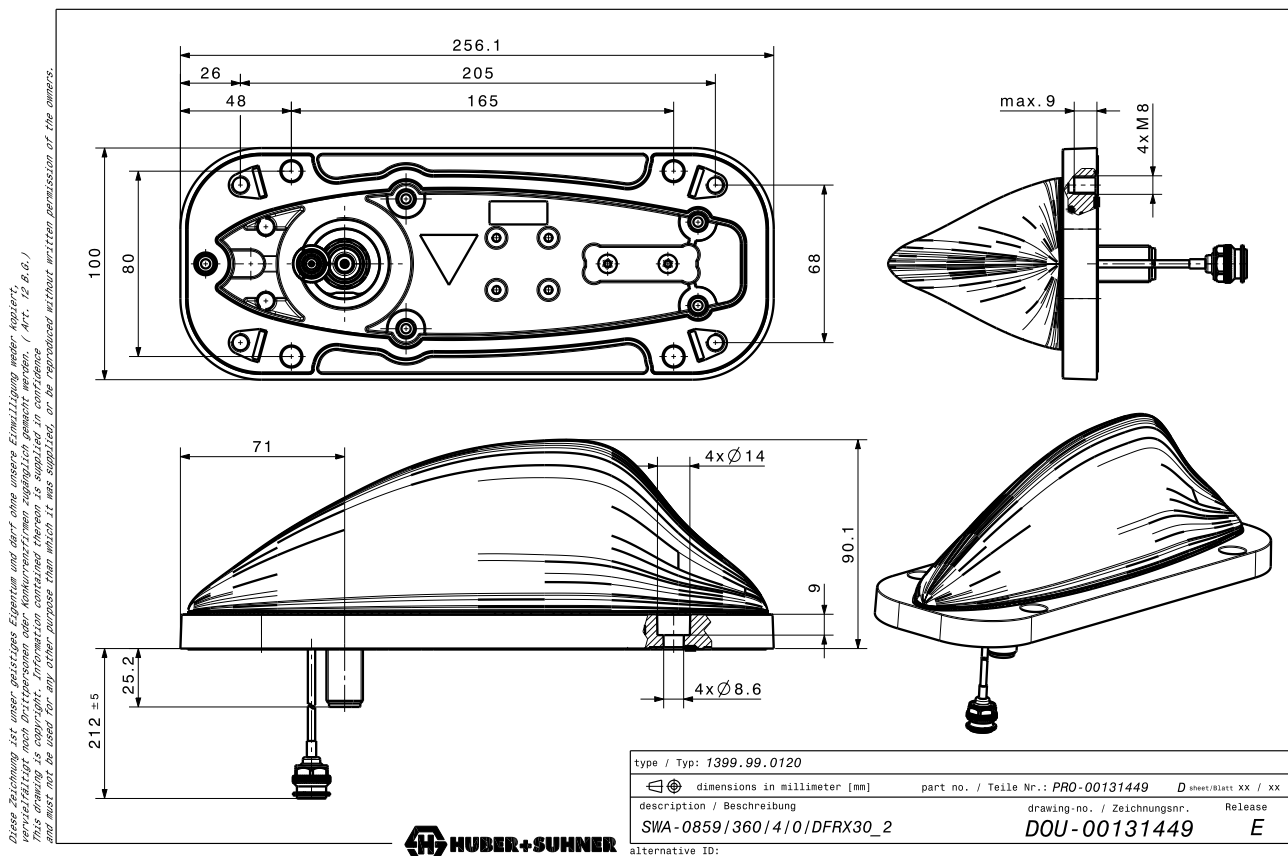
Environmental tests: EN 50155:2018-05

Flammability rating: EN45545-2:2013 + A1:2015, NFPA-130:2017 Tested according to ISO 4589-2:2017, NFX 70-100-1:2006, ISO 5659-2:2011.

Antennas with production date prior to 01-Oct-2020 do not have NFPA-130 compliance.

Additional Information

This product meets the Deutsche Bahn specifications for rolling stock equipment. Protected by Patents: US7327320B2, CN1765030B, AU2003218856A1, CA2521771C, SG114406, ZA200508290.

Outline drawing

SENCITY® Rail Antenna with GNSS/LNA

1399.99.0120

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P3214 / Date of publication: 12.02.2024 / uncontrolled copy