

PROTECTIVE CAPS

For any receptacle, we have a cap solution



Description

Protect your plugs and receptacles against dust, water, moisture, EMI.

Main Features

Protective caps for:

- 38999 Series I, II, III (MIL-DTL-38999/EN3645)
- 26482/PT/451 Series (MIL-DTL-26482)
- RJ Field & USB Field

...with many benefits:

- Time & Cost Saving with quick delivery (4 weeks max)
- A large range of caps & receptacles with Black Zinc Nickel and QPL qualified plating available




Rubber Standard Caps **NEW**

(for 26482 & 38999)



Composite Self-Closing Caps **NEW**

(for 26482)

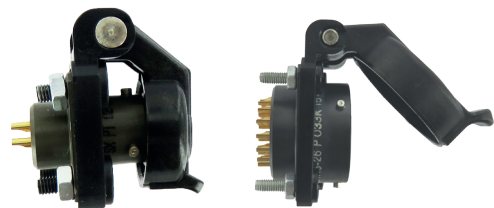


Metallic Standard Caps

(for 26482 & 38999)



Metallic Self-Closing Caps **NEW**

(for 38999)

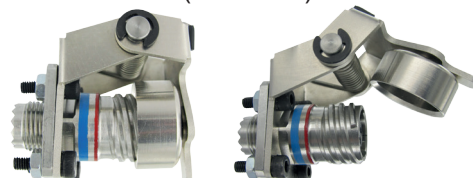

Markets & Applications



Ground Vehicle



Commercial Aerospace



Missile





Industrial




Applications:

- › I/O connectors for boxes
- › Communication systems on the field
- › Various embedded equipment

PROTECTIVE CAPS



| | Rubber Standard Caps | Composite Self-Closing Caps | Metallic Standard Caps | Metallic Self-Closing Caps |
|---------------------------|--|---|--|---|
| Availability | • Available & New | • Available & New | • Available | • Available & New |
| Compatibility | <ul style="list-style-type: none"> • 38999 Series I, II, III (MIL-DTL-38999/EN3645) • PT/451 Series (MIL-DTL-26482) • RJ Field & USB Field • Amphenol Sine RT360 | <ul style="list-style-type: none"> • PT/451 Series (MIL-DTL-26482) • RJ Field • Amphenol Sine RT360 | <ul style="list-style-type: none"> • 38999 Series I, II, III (MIL-DTL-38999/EN3645) • PT/451 Series (MIL-DTL-26482) • RJ Field & USB Field | <ul style="list-style-type: none"> • 38999 Series III (MIL-DTL-38999/EN3645) • RJ Field & USB Field |
| Types | All receptacles | Square Flange receptacles only | All receptacles & plugs | All receptacles |
| Sizes | 6 Sizes available : <ul style="list-style-type: none"> • TV : 9, 11, 13, 15, 17, 19 • PT : 10, 12, 14, 16, 18, 20 | 6 Sizes available : <ul style="list-style-type: none"> • PT : 8, 10, 12, 14, 16, 18 | 9 Sizes available : <ul style="list-style-type: none"> • TV : 9, 11, 13, 15, 17, 19, 21, 23, 25 • PT : 8, 10, 12, 14, 16, 18, 20, 22, 24 | Sizes available : <ul style="list-style-type: none"> • Square flange : 9, 11, 13, 15, 17, 19 • Jam nut : 15, 19 |
| IP | • IP67 (1m, 30 min sealing) | • IP54 (splash proof) | • IP68 (permanent sealing) | • IP67 (1m, 30 min sealing) |
| Materials/Plating | • Silicone 200°C | • Composite 125°C | <ul style="list-style-type: none"> • Aluminum <u>Plating:</u> Electroless Nickel, O.D Cadmium, Black Zinc Nickel, Green Zinc Nickel • Stainless Steel <u>Plating:</u> Nickel, Passivated • Bronze | <ul style="list-style-type: none"> • Aluminum <u>Plating:</u> Electroless Nickel, O.D Cadmium, Black Zinc Nickel, Black Painted |
| Protection against |   |   |     |     |

Link

Rubber Standard Caps

- Nylon cord

Metallic Standard Caps*

- Nylon cord
- Stainless steel rope
- Metallic chain

* All combinations are not available, please consult us.

Termination

For both Rubber & Metallic Standard Caps

- For 07 shell type



- For 00, 02 shell types



- For 01, 06, 08 shell types

