

VECO VANSONIC ENTERPRISE CO., LTD.

8F., No. 7, Lane 16, Sec. 2, Szechwan Road, Panchiao, Taipei Hsien, TAIWAN.

TEL: +886-2-29626335




FAX: +886-2-29625220

E-MAIL: vansonic@ms4.hinet.net

1.	MODEL:	16CR08F-1 -M38ND(Black Mylar)-M38NT(Clear Mylar)					
2.	Dimension	Outer Diameter	16	mm.	Baffle Opening	15.5	mm.
		Height	Refer to Drawing .		Weight	1.6	Grams.
3.	Magnet	Materials	Rare Earth .		Size	∅ 6.5x0.8 mm.	
4.	Nominal Impedance	8	±	15	%	At	1500 Hz.
5.	Power Rating	Normal	500	mW.	Maximum	1000	mW.
6.	Lowest Resonant Frequency	800	±	20	%	Hz.	
7.	Output Sound Pressure Level (S.P.L.)	78	±	3	db / 0.5 Watt .	0.5 Meter.	
		Average at		800, 1000, 1200, 1500	Hz.		
8.	Frequency Range	400	~	20000	Hz.	Average SPL - 10 db.	
9.	Distortion	5	%	Maximum At	1000	Hz.	500 mW.
10.	Abnormal Sound Test	Must Be Normal Test By		2.0	Volts.	Sine Wave.	
11.	Load Test	White Noise With Weighted Filter		2.0	Volts.(RMS)	24 Hrs.	
12.	Polarity	Diaphragm shall move Forward when Apply a Positive DC.					
		Current to the "+" or "Marked" Terminal.					

MOUNTING NOTICE


At Least
0.6 mm
For
Diaphragm
Moving

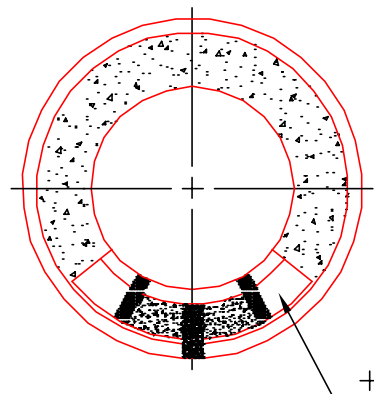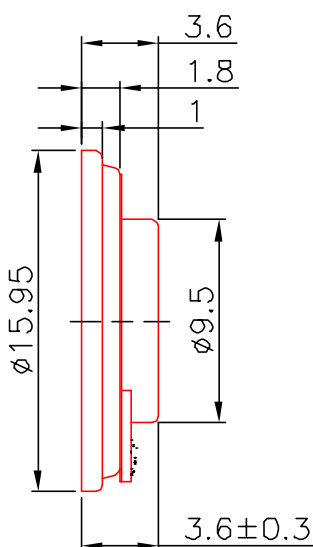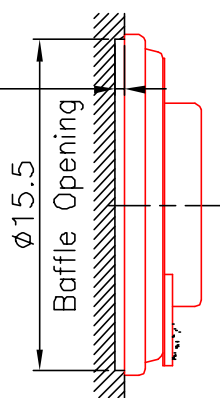

Unit : mm

Housing Material : METAL

16CR08F-1-M38NT VOL:2.0V(0.5W) DIS:0.5M VANSONIC
X:1.0000kHz *Y:81.04dB ZA:1.0000 SSR Fund.

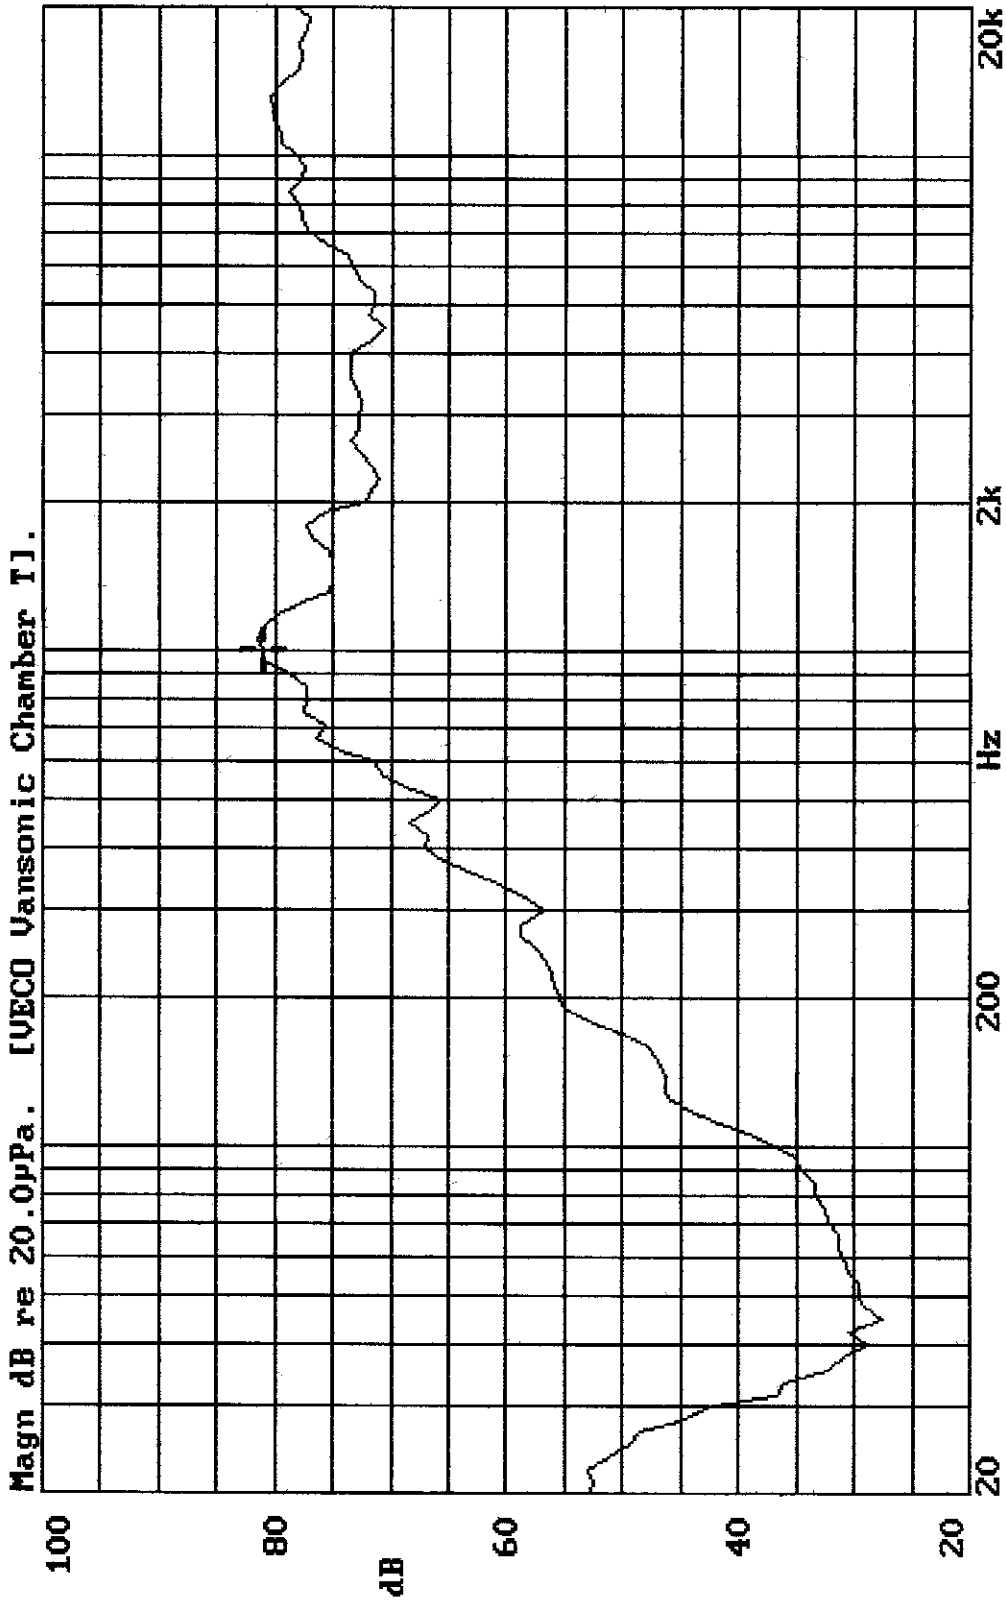

22-NOV-2001 11:27:23

Mode: SPEAKER

