

VECO VANSONIC ENTERPRISE CO., LTD.

8F., No. 7, Lane 16, Sec. 2, Szechwan Road, Panchiao, Taipei Hsien, TAIWAN.




TEL: +886-2-29626335

FAX: +886-2-29625220

E-MAIL: VANSONIC@MS4.HINET.NET

| | | | | | |
|-----|---|--|-------------------|----------------------|----------------|
| 1. | MODEL: | 20CS08F -M38NDBlack Mylar)-M38NT(Clear Mylar) | | | |
| 2. | Dimension | Outer Diameter | 20 mm. | Baffle Opening | 19.0 mm. |
| | | Height | Refer to Drawing. | Weight | 2.8 Grams. |
| 3. | Magnet | Materials | Rare Earth | Size | ∅ 8X 1.0 mm. |
| 4. | Nominal Impedance | 8 | ± 15 % | At | 1500 Hz. |
| 5. | Power Rating | Normal | 200 mW. | Maximum | 400 mW. |
| 6. | Lowest Resonant Frequency | 670 | ± 20 % | | Hz. |
| 7. | Output Sound Pressure Lever (S.P.L.) | 78 ± 3 db / 0.2 Watt . 0.5 Meter. | | | |
| | | Average at | 800, | 1000, | 1200, 1500 Hz. |
| 8. | Frequency Range | 400 | ~ 8500 Hz. | Average SPL - 10 db. | |
| 9. | Distortion | 5 % | Maximum At | 1000 Hz. | 200 mW. |
| 10. | Abnormal Sound Test | Must be Normal Tested By | | 1.3 Volts. | Sine Wave. |
| 11. | Load Test | White Noise with Weighted Filter | | 1.3 Volts.(RMS) | 24Hrs. |
| 12. | Polarity | Diaphragm shall move Forward when Apply a Positive DC. | | | |
| | | Current to the "+" or "Marked" Terminal. | | | |


MOUNTING NOTICE

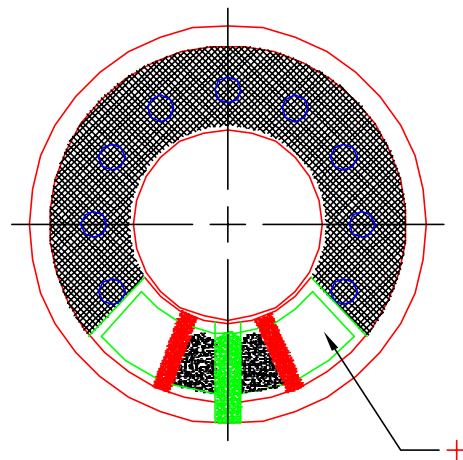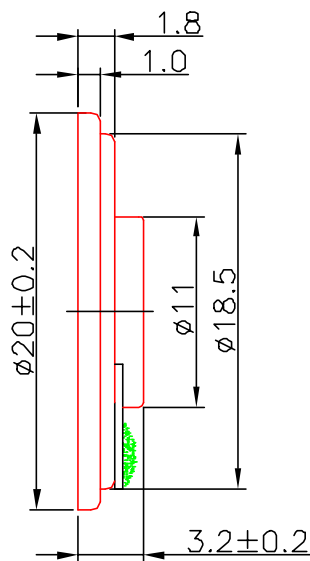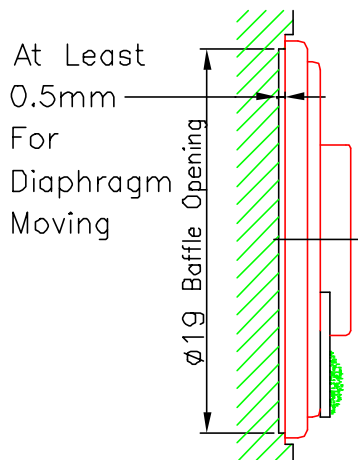

Unit : mm

Housing Material : METAL

20CS08F-38ND Vol:1.265V(0.2W) Dis:0.5M VANSOINIC
X:1.0000kHz *Y:78.25dB ZA:Live Curve SSR Fund.

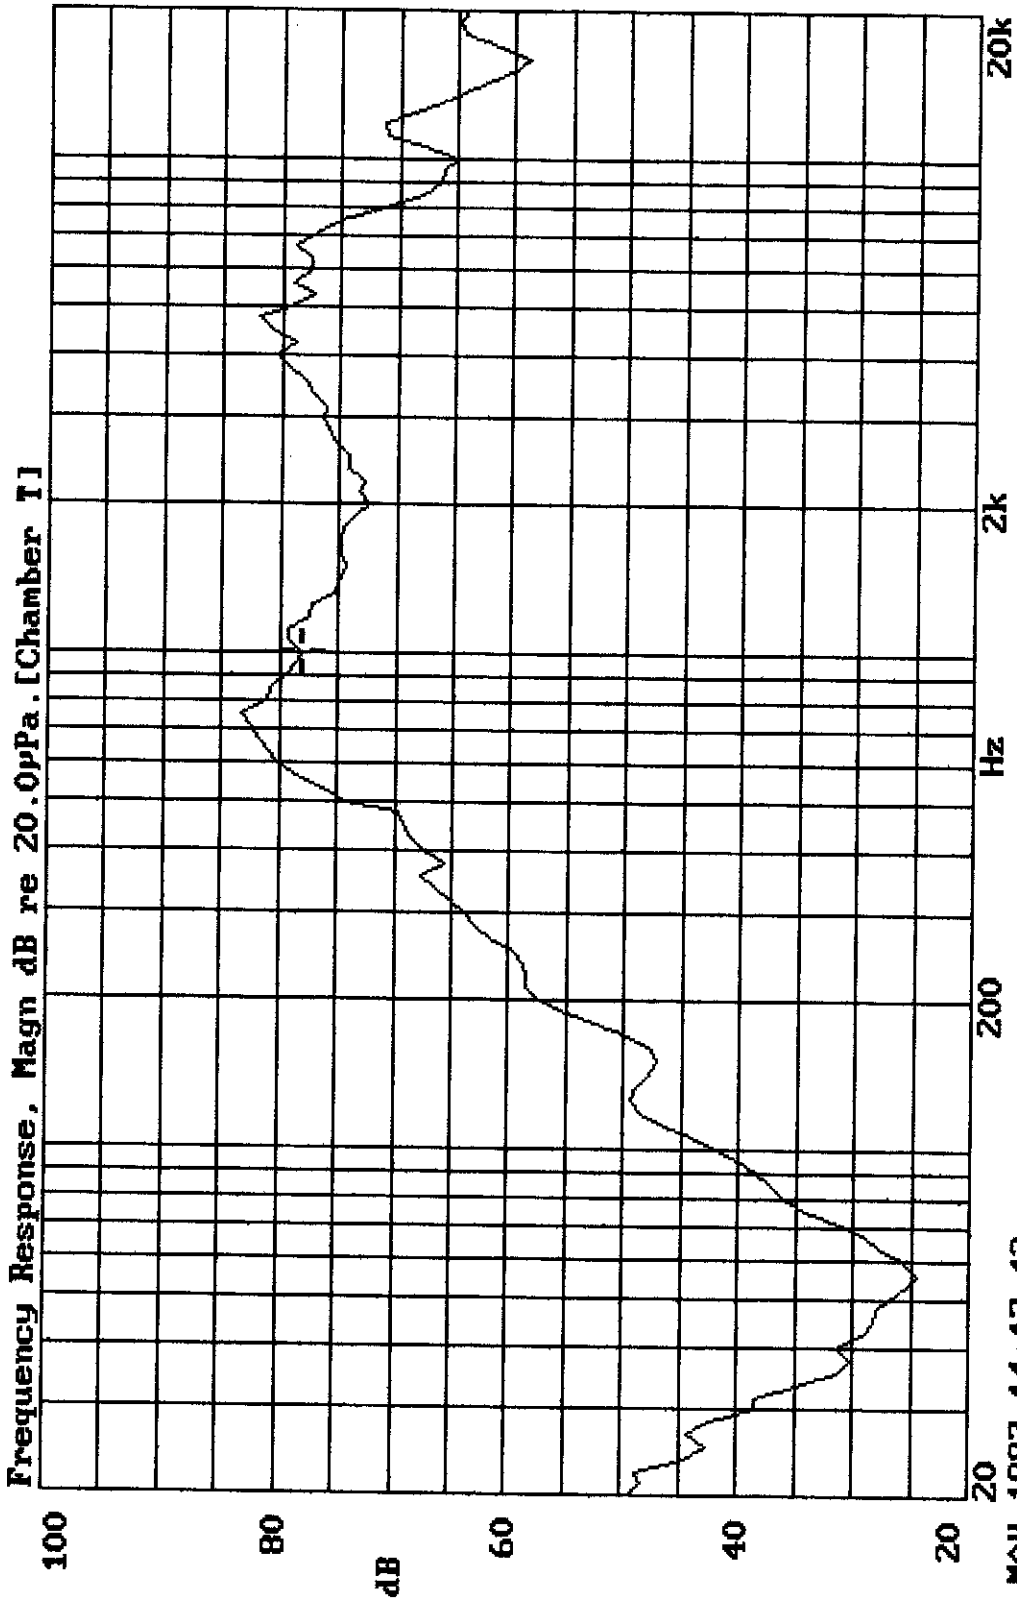

17-MAY-1997 14:17:43

Mode: SSR

