
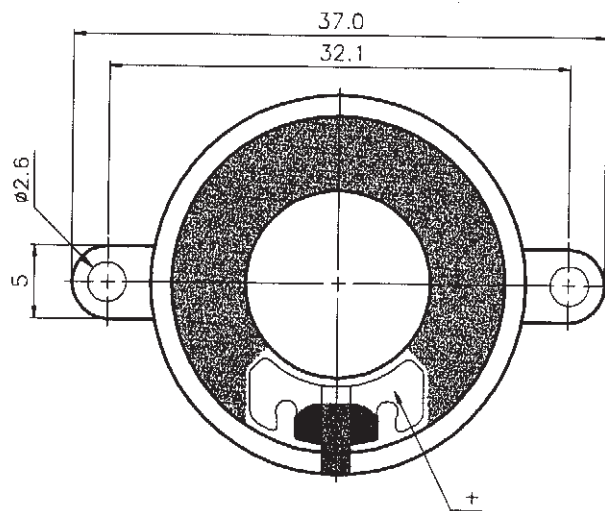
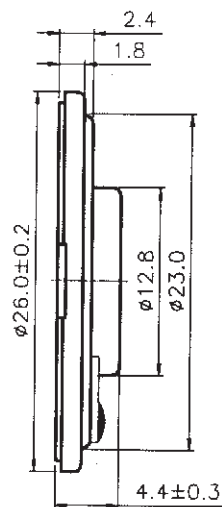


VECO VANSONIC ENTERPRISE CO.,LTD.

8F.,No.7,Lane 16, Sec.2, Szechwan Road, Panchiao, Taipei Hsien, TAIWAN.
 TEL: +866-2-29626335 TEL: +866-2-29625220 E-MAIL: vansonic@ms4.hinet.net

1.	MODEL:	26CR08FE -E75NT(Resistant High Temperature)
2.	Dimension	Outer Diameter 26 mm. Baffle Opening 22.5 mm.
		Height Refer to Drawing . Weight 4.6 Grams.
3.	Magent	Materials Rear Earth . Size ϕ 9.5X1.5 mm.
4.	Nominal Lmpedance	8 Ω \pm 15 % At 1500 Hz.
5.	Power Rating	Normal 1000 mW. Maximum 1500 mW.
6.	Lowest Resonant Frequency	670 \pm 20 % Hz.
7.	Output Sound Pressure Lever (S.P.L.)	85 \pm 3 db / 1.0 Watt \cdot 0.5 Meter.
		Average at 600, 800, 1000, 1200 Hz.
8.	Frequency Range	425 ~ 20000 Hz. Average S P L - 10 db.
9.	Distortion	5 % Maximum At 1000 Hz. 1000 mW.
10.	Abnormal Sound Test	Must Be Normal Test By 2.8 Volts. Sine Wave.
11.	Load Test	White Noise With Weighted Filter 2.8 Volts.(RMS) 24 Hrs.
12.	Polarity	Diaphragm shall move Forward when Apply a Positive DC.
		Current to the "+" or "Marked" Terminal.


MOUNTING NOTICE

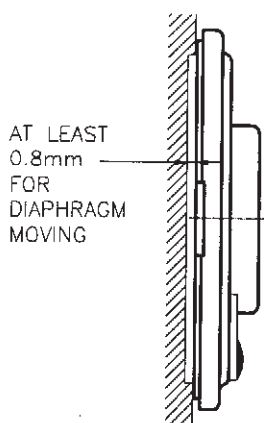

Unit : mm

Housing Material : METAL

26CRO8FE-E75NT Uo1:2.828V(1.0W) Dis:0.5M VANSONIC
X:1.0000KHZ *Y:84.18dB ZA:3.0000 SSR Fund.

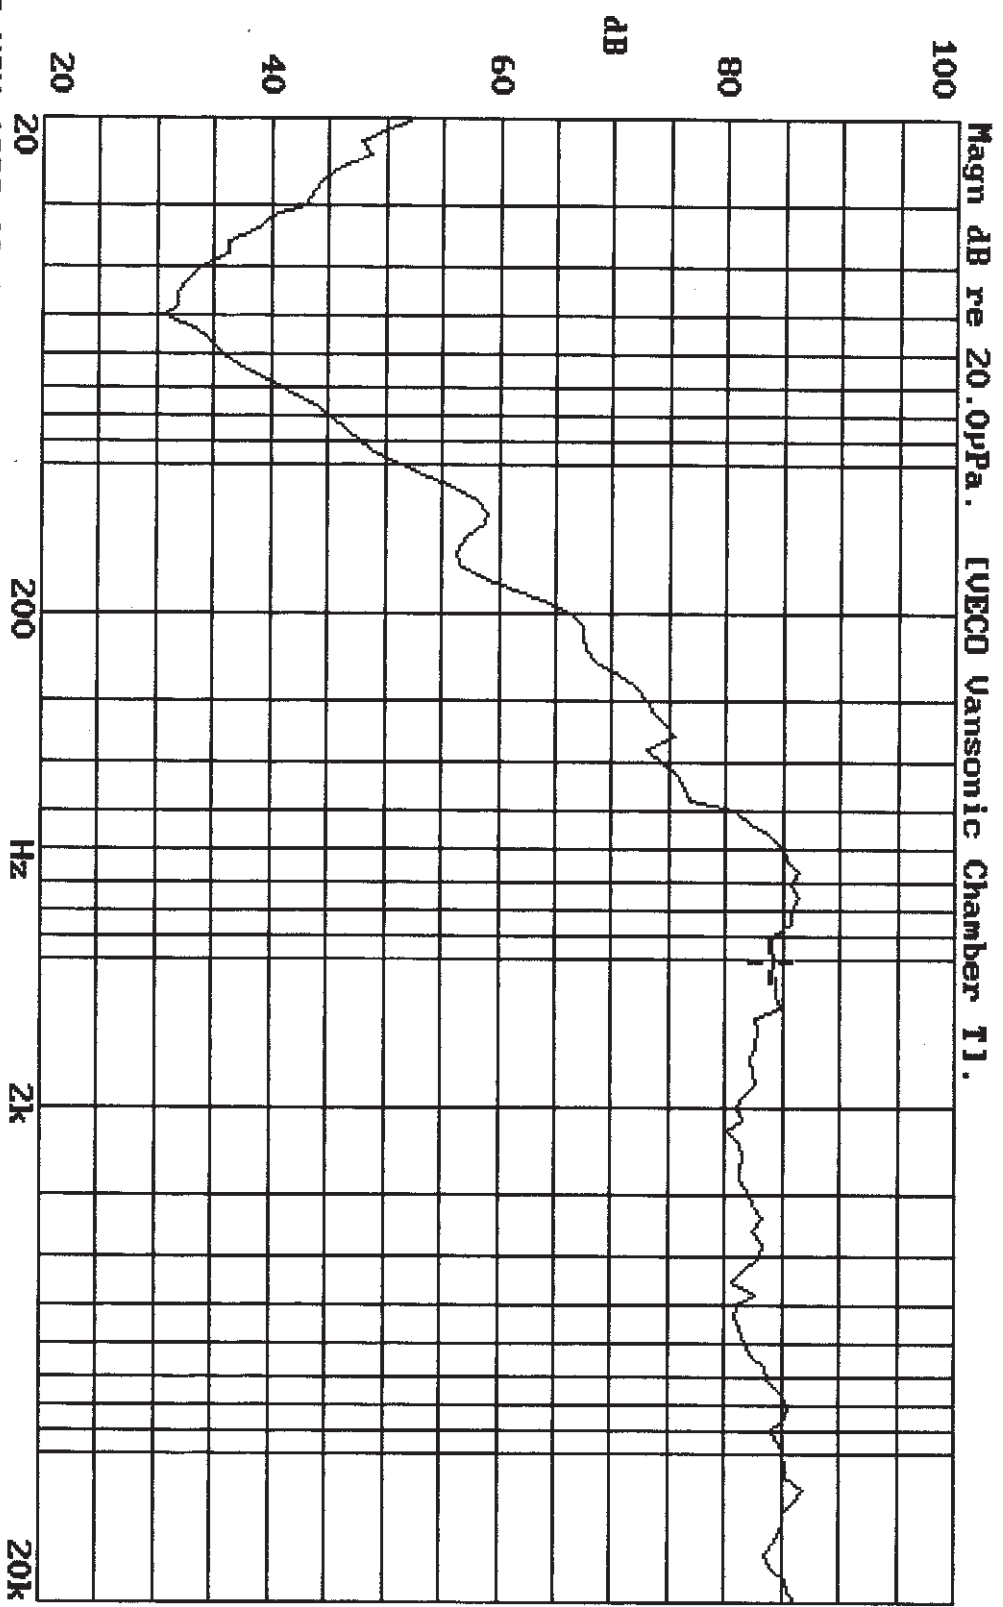

25-NOV-1998 09:57:03

Mode: SSR

