

VECO VANSONIC ENTERPRISE CO., LTD.



8F., No.7, Lane 16, Sec.2, Szechwan Road, Panchiao, Taipei Hsien, TAIWAN.

TEL: +886-2-29626335

FAX: +886-2-29625220

E-MAIL: VANSONIC@MS4.HINET.NET


1.	MODEL:	30CL08G -M75ND(Black Mylar) -M75NT(Clear Mylar)			
2.	Dimension	Outer Diameter	30 mm.	Baffle Opening	28.4 mm.
		Height	Refer to Drawing.	Weight	9.8 Grams.
3.	Magnet	Materials	Rare Earth	Size	∅ 18X∅ 10X2 mm.
4.	Nominal Impedance	8	± 15 %	At	2000 Hz.
5.	Power Rating	Normal	400 mW.	Maximum	800 mW.
6.	Lowest Resonant Frequency	650	± 20 %		Hz.
7.	Output Sound Pressure Level (S.P.L.)	88	± 3 db / 0.4 Watt	. 0.5 Meter.	
		Average at	800, 1000, 1200, 1500	Hz.	
8.	Frequency Range	500	~ 10000 Hz.	Average SPL - 10 db.	
9.	Distortion	5 %	Maximum At	1000 Hz.	400 mW.
10.	Abnormal Sound Test	Must be Normal Tested By		1.8 Volts.	Sine Wave.
11.	Load Test	White Noise with Weighted Filter		1.8 Volts.(RMS)	24Hrs.
12.	Polarity	Diaphragm shall move Forward when Apply a Positive DC.			
		Current to the "+" or "Marked" Terminal.			

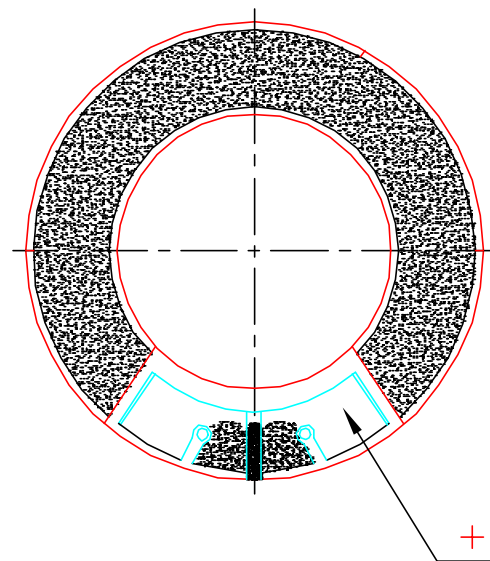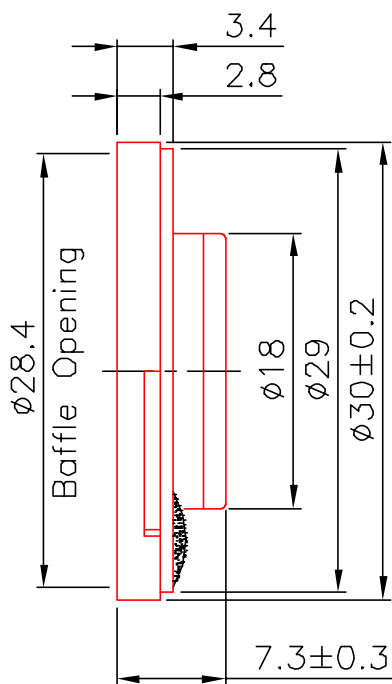

Unit : mm

Housing Material : ABS

30CL08G-M75NT VOL:1.788V(0.4) DIS:0.5M VANSOONIC
X:10.000kHz *Y:76.74dB ZA:Live Curve SSR Fund.

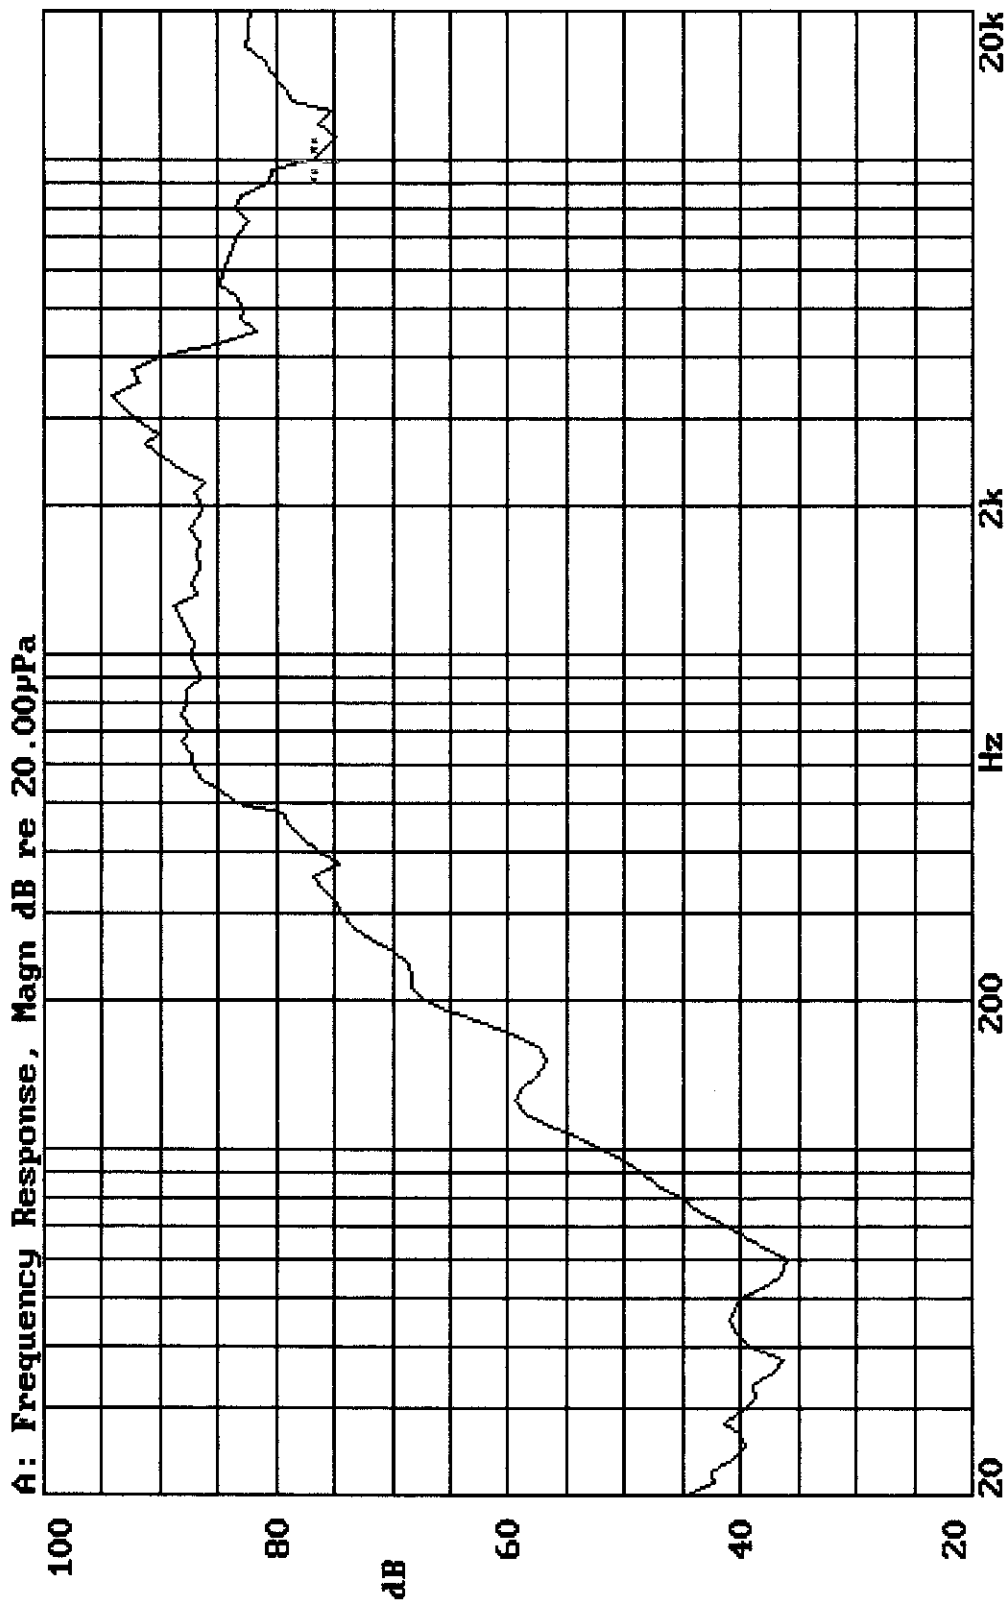

06-JUL-1999 14:20:03

Mode: SSR

