


Features

1. High current transfer ratio
(CTR:MIN.600% at $I_F=1\text{mA}$, $V_{CE}=2\text{V}$)
2. High isolation voltage between input and output
(Viso:5000Vrms).
3. Compact dual-in-line package.


Applications

1. System appliances, measuring instruments.
2. Industrial robots.
3. Copiers, automatic vending machines.
4. Signal transmission between circuits of different potentials and impedances.

Outside Dimension:Unit (mm)

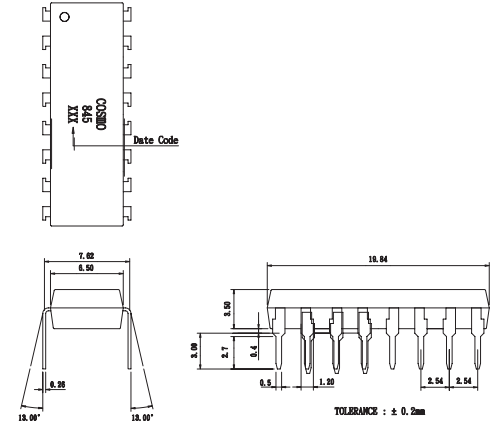

Schematic:Top View



01,03,05,07 Anode
 02,04,06,08 Cathode
 09,11,13,15 Emitter
 10,12,14,16 Collector

Absolute Maximum Ratings

($T_a=25^\circ\text{C}$)

Parameter		Symbol	Rating	Unit
Input	Forward current	I_F	50	mA
	Peak forward current	I_{FM}	1	A
	Reverse voltage	V_R	6	V
	Power dissipation	P_D	70	mW
Output	Collector-emitter voltage	V_{CEO}	35	V
	Emitter-collector voltage	V_{ECO}	6	V
	Collector current	I_C	80	mA
	Collector power dissipation	P_C	150	mW
Total power dissipation		P_{tot}	200	mW
Isolation voltage 1 minute		Viso	5000	Vrms
Operating temperature		T_{opr}	-30 to +100	$^\circ\text{C}$
Storage temperature		T_{stg}	-55 to +125	$^\circ\text{C}$
Soldering temperature 10 second		T_{sol}	260	$^\circ\text{C}$

Electro-optical Characteristics

($T_a=25^\circ\text{C}$)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V_F	$I_F=20\text{mA}$		1.2	1.4	V
	Peak forward voltage	V_{FM}	$I_{FM}=0.5\text{A}$			3.0	V
	Reverse current	I_R	$V_R=4\text{V}$			10	μA
	Terminal capacitance	C_t	$V=0$, $f=1\text{kHz}$		30	250	pF
Output	Collector dark current	I_{CEO}	$V_{CE}=10\text{V}$, $I_F=0$			1.0	μA
Transfer characteristics	Current transfer ratio	CTR	$I_F=1\text{mA}$, $V_{CE}=2\text{V}$	600		7500	%
	Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_F=20\text{mA}$, $I_C=5\text{mA}$		0.8	1.0	V
	Isolation resistance	Riso	DC500V, 40 to 60% RH	5×10^{10}	旻		ohm
	Floating capacitance	C_f	$V=0$, $f=1\text{MHZ}$		0.6	1.0	pF
	Cut-off frequency	f_c	$V_{CC}=2\text{V}$, $I_C=20\text{mA}$, $R_L=100\text{ohm}$	1	6		kHz
	Response time (Rise)	t_r	$V_{CE}=2\text{V}$, $I_C=2\text{mA}$, $R_L=100\text{ohm}$		80	300	μs
Response time (Fall)	t_f			72	250	μs	

Fig.1 Forward Current vs. Ambient Temperature

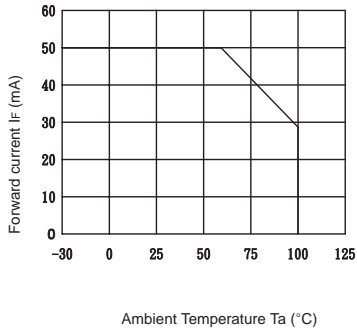


Fig.2 Collector Power Dissipation vs. Ambient Temperature

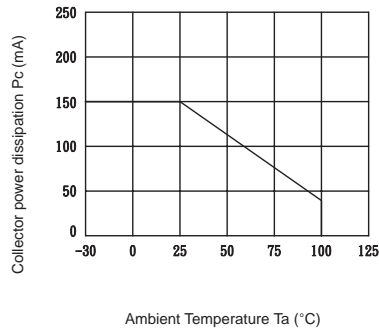


Fig.3 Collector-emitter Saturation Voltage vs. Forward Current

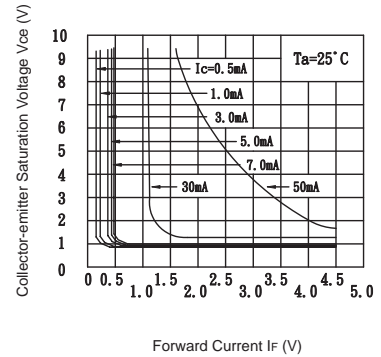


Fig.4 Forward Current vs. Forward Voltage




Fig.5 Collector Transfer Ratio vs. Forward Current

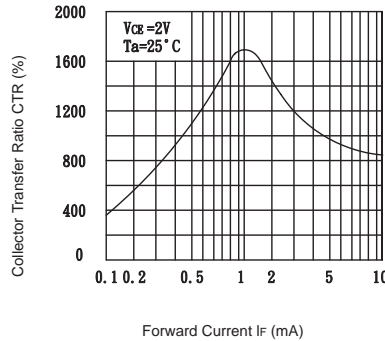


Fig.6 Collector Current vs. Collector-emitter Voltage

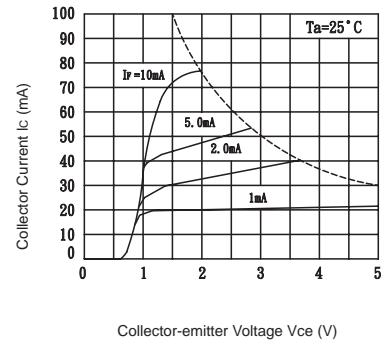


Fig.7 Relative Transfer Ratio vs. Ambient Temperature

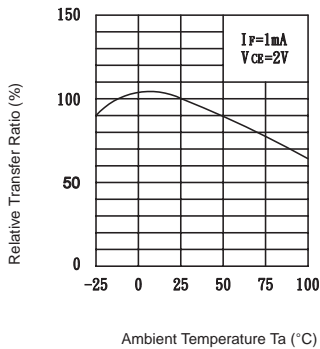


Fig.8 Collector-emitter Saturation Voltage vs. Ambient Temperature




Fig.9 Collector Dark Current vs. Ambient Temperature

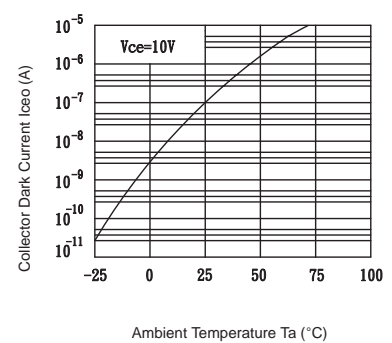


Fig.10 Response Time vs. Load Resistance

