

THERMISTOR SPECIFICATIONS

1) SCOPE

This specifications define rating, dimensions, insulation, climatic sequence and mechanical characteristics for AT type thermistor.

2) PART NO. : **104AT-2**

3) RATING

3-1) Rated zero-power resistance. R_{25} : 100 k Ω \pm 1 % (at 25 °C)

3-2) B value. $B_{25/85}$: 4,665 K \pm 1 %

* The B value is calculated using the zero-power resistance values measured at 25°C and 85°C.

3-3) Dissipation factor. : Approx. 2 mW/°C (in air)

3-4) Thermal time constant. : Approx. 15 s (in air)


3-5) Maximum power rating. : 10 mW (at 25°C)

3-6) Category temperature range : -50 ~ 110 °C


(= Operating temperature range)

4) DIMENSIONS

UNIT: [mm]

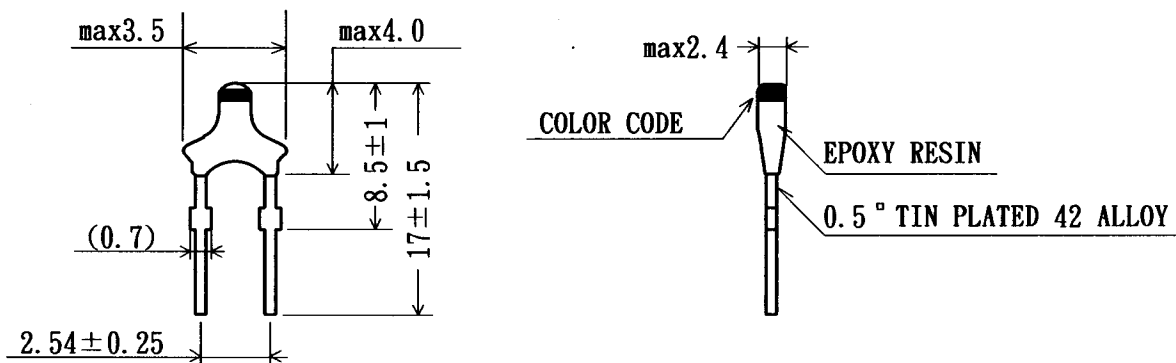

COLOR CODE : None

Spec. NO. : STANDARD-01		Note	REVISION	
Date: APRIL 06, 1994			A	
Approved		Checked 4-17-94	B	
		Drawn	G. TATEISHI	C

AT-01-20

1/3

NSSP-AT-214

5) INSULATION

5-1) Insulation resistance

Insulation resistance of the test samples shall be over 100 MΩ when it is measured at DC 500V between coated area and lead wires.

6) CLIMATIC TEST

6-1) Dry heat

After the test samples were exposed in air at 110 °C for 1,000 hours, the change ratio of the rated zero-power resistance shall be within ± 1% of the initial value.

6-2) Damp heat

After the test samples were exposed in the humidity of 95% at 40°C for 1,000 hours, the change ratio of the rated zero-power resistance shall be within ± 1% of the initial value.

6-3) Cold

After the test samples were exposed in air at -55°C for 1,000 hours, the change ratio of the rated zero-power resistance shall be within ±1% of the initial value.

6-4) Humidity load

After DC 1mA current was applied to the test samples in the temperature of 40°C and the humidity of 95% for 1,000 hours, the change ratio of the rated zero-power resistance shall be within ± 1% of the initial value.

6-5) Change of temperature

One cycle of the change of temperature shall be carried out in the order of the following conditions.

- Room ambient temperature. (Initial value)
- At -30°C, for 30 minutes.
- Room ambient temperature, for 3 minutes.
- At + 90°C, for 30 minutes.
- Room ambient temperature. for 3 minutes.

After 100 cycles of change of temperature, the change ratio of the rated zero-power resistance shall be within ±1% of the initial value.

6-6) High temperature load

After DC 1mA current was applied to the test samples in the temperature of 110°C for 1,000 hours, the change ratio of the rated zero-power resistance shall be within $\pm 1\%$ of the initial value.

7) MECHANICAL CHARACTERISTICS

7-1) Robustness of terminations

Ua: Tensile

After 2 kgf loading weight for 10 seconds was applied to the wire terminations, there shall be no visible damage.

7-2) Free fall

After one time natural fall to a maple board from 1 m high, there shall be no visible damage.

7-3) Resistance to soldering heat

After lead wire of the test samples were dipped one time within 8.5 mm from end of lead wire in solder bath at $260^{\circ}\text{C} \pm 10^{\circ}\text{C}$ for 10 ± 0.5 seconds, the change ratio of the rated zero-power resistance shall be within $\pm 1\%$ of the initial value.