



SPECIFICATION

OLED SPECIFICATION

Model No:

REA006448A

RAYSTAR OPTRONICS

General Specification


The Features is described as follow:

- Module dimension: 19.9 x 23.1 x 2.4 mm
- Active area: 13.42 x 10.06 mm
- Dot Matrix: 64 x 48
- Pixel Size: 0.185 x 0.185 mm
- Pixel Pitch: 0.210 x 0.210 mm
- Duty: 1/48 Duty
- Display Mode: Passive Matrix
- Display Color: Monochrome
- Interface: I2C
- IC: SSD1306BZ
- SIZE: 0.66 inch

Interface Pin Function

No.	Symbol	Function
1	GND	Ground
2	VCC	Power supply input.
3	SCL	When the I2C interface is selected, then D0 serves as the serial clock input pad (SCL) and D1 serves as the serial data input pad (SDAI).
4	SDA	

Contour Drawing & Block Diagram

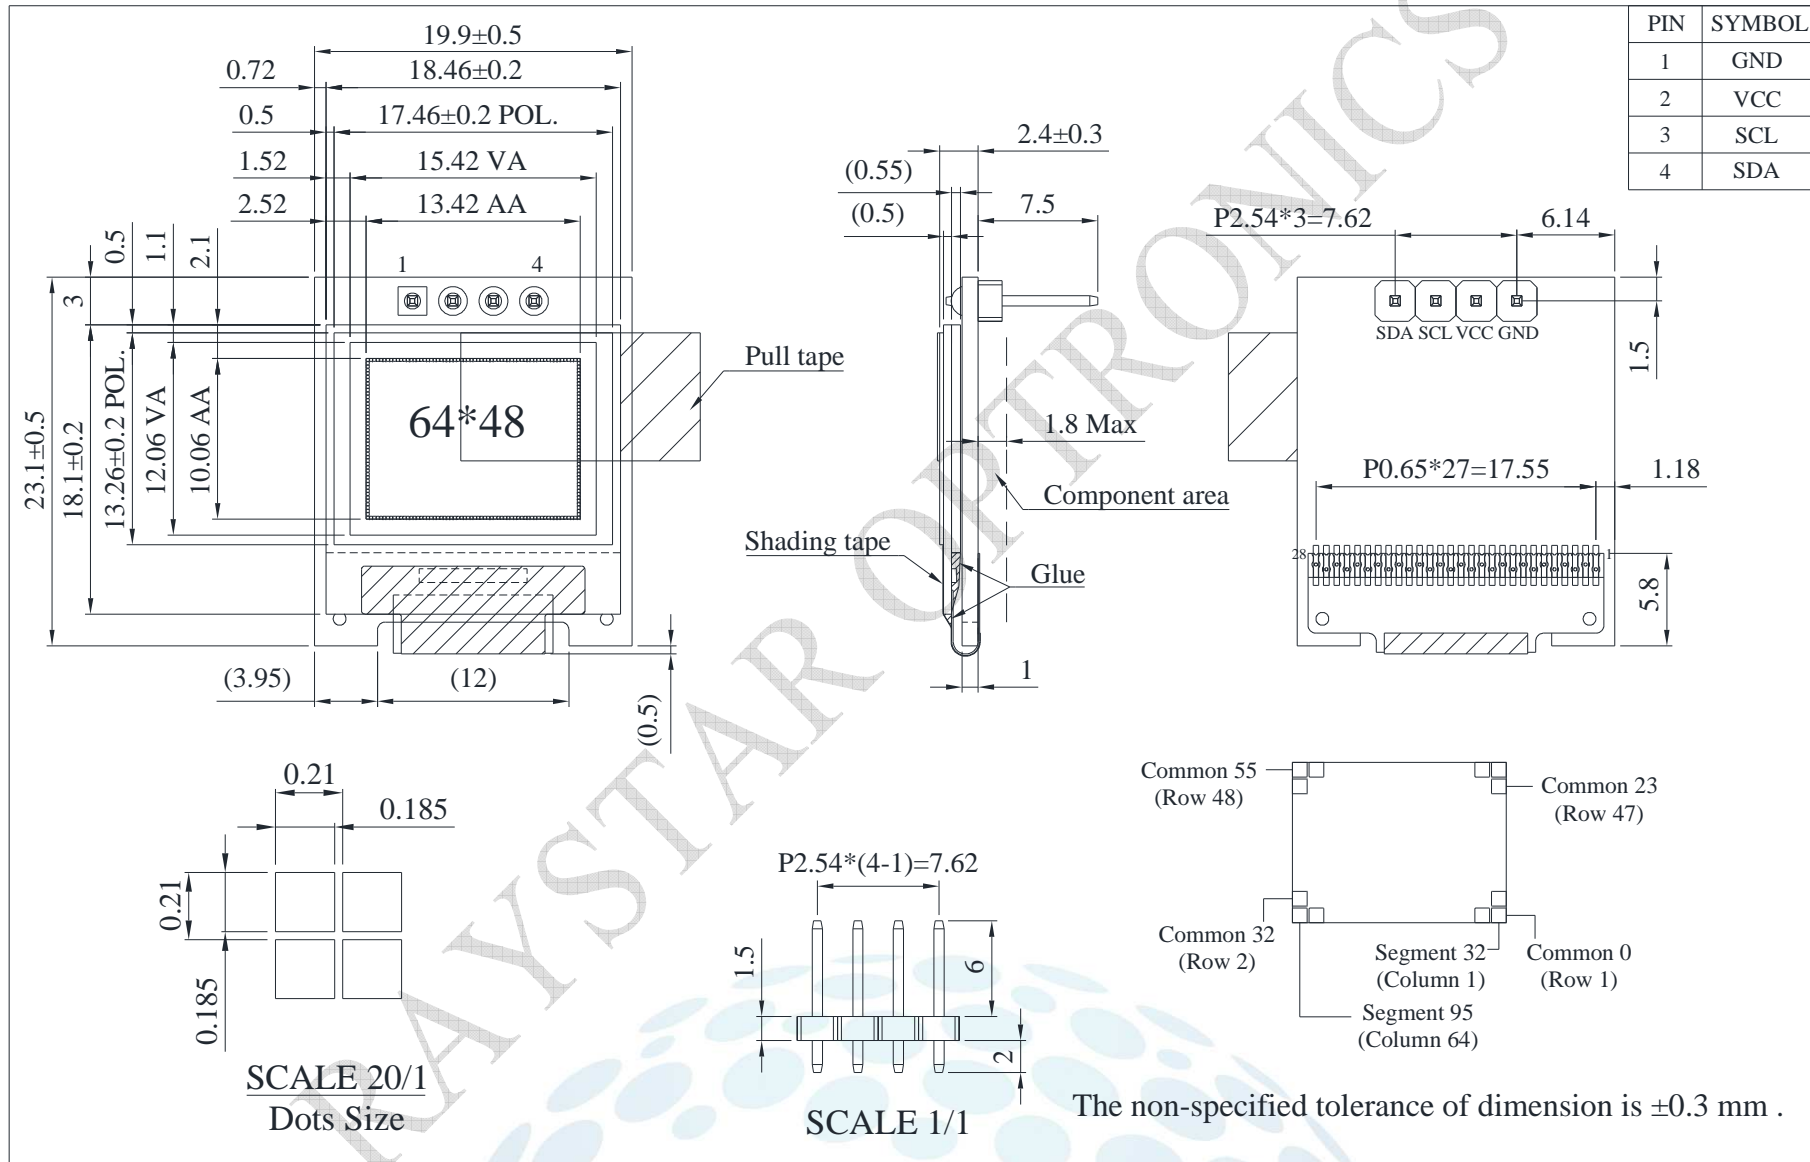

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Supply Voltage for Logic	VDD	0	4.0	V
Supply Voltage for Display	VCC	0	16.0	V
Operating Temperature	TOP	-40	+80	°C
Storage Temperature	TSTG	-40	+85	°C

Electrical CharacteristicsDC Electrical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage for Logic	VDD	—	2.8	3.0	3.3	V
Input High Volt.	VIH	—	0.8×VDD	—	VDDIO	V
Input Low Volt.	VIL	—	0	—	0.2×VDD	V
Output High Volt.	VOH	—	0.9×VDD	—	VDDIO	V
Output Low Volt.	VOL	—	0	—	0.1×VDD	V
50% check Board operating Current	ICC	VCC=7.5V	—	12.0	20.0	mA