

ME-CA Series

Small

Low Impedance




- 105°C 1,000 to 3,000hours
- Solvent proof (within 5 minutes)

Specifications

Items	Condition	Specifications					
Rated voltage (V)	—	6.3	10	16	25	35	50
Surge voltage (V)	Room temperature	8.0	13	20	32	44	63
Category temperature range (°C)	—	-55 to +105					
Capacitance tolerance (%)	120Hz/20°C	M : ±20					
Dissipation Factor (tan δ)	tanδ(max.) 120Hz/20°C	0.28	0.24	0.20	0.16	0.14	0.12
Leakage current (LC)	μA/after 2minutes (max.), 20°C	Exceeding 1,000μF, +0.02 every 1,000μF					
Impedance ratio at low temperature	Based on the value at 120Hz, +20°C	-40°C Z/Z _{20°C}	3	3	2	2	2
		-55°C Z/Z _{20°C}	6	5	4	4	3
Endurance	105°C rated voltage applied (With the rated ripple current)	Test	φ5 to φ8 : 1,000hours, φ10 : 2,000hours, φ12.5 to φ16 : 3,000hours				
		ΔC/C	Within ±25% of the initial value				
		tanδ	Less than 200% of the specified value				
		LC	Less than the specified value				

Dimensions

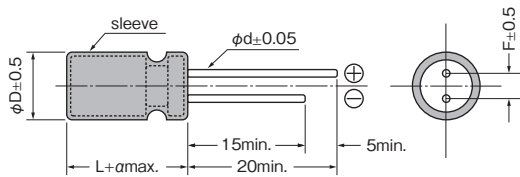

$$\alpha : L < 20 \quad \alpha = 1.5, L \geq 20 \quad \alpha = 2.0$$

 A pressure relief vent is provided for $\phi D = 6.3$ or bigger

(Unit : mm)

ϕD	5	6.3	8	10	12.5	16
F	2.0	2.5	3.5	5.0	5.0	7.5
ϕd	0.5	0.5	0.6	0.6	0.6	0.8

Size, Impedance, Rated Ripple Current


Case size $\phi D \times L$ (mm)	Items	6.3			10		
		Capacitance (μF)	Impedance (Ωmax.) (20°C/100kHz)	Rated ripple current (mA rms) (105°C/10k to 200kHz)	Capacitance (μF)	Impedance (Ωmax.) (20°C/100kHz)	Rated ripple current (mA rms) (105°C/10k to 200kHz)
5×11		220	0.50	180			
6.3×11		330	0.30	280	220	0.30	280
6.3×11		470	0.24	280	330	0.24	280
8×11.5		1000	0.15	560	470	0.16	410
10×12.5					1000	0.086	710
10×16		2200	0.066	950			
10×20		3300	0.047	1150	2200	0.047	1150
12.5×20		4700	0.042	1460	3300	0.042	1460
12.5×25		6800	0.031	1780	4700	0.031	1780
16×25		10000	0.026	2000	6800	0.026	2000
16×31.5					10000	0.022	2200
16×35.5		15000	0.022	2200			

Size, Impedance, Rated Ripple Current

Case size Items φD×L(mm)	16			25		
	Capacitance (μF)	Impedance(Ωmax.) (20°C/100kHz)	Rated ripple current(mArms) (105°C/10k to 200kHz)	Capacitance (μF)	Impedance(Ωmax.) (20°C/100kHz)	Rated ripple current(mArms) (105°C/10k to 200kHz)
5×11	100	0.50	180			
6.3×11	220	0.24	280	100	0.30	280
8×11.5	330	0.16	410	220	0.16	410
8×11.5	470	0.15	560	330	0.15	560
10×12.5				470	0.086	710
10×16	1000	0.066	950			
10×20				1000	0.047	1150
12.5×20	2200	0.042	1460			
12.5×25	3300	0.035	1780	2200	0.035	1780
16×25	4700	0.026	2000	3300	0.026	2000
16×31.5	6800	0.022	2200	4700	0.022	2200

Case size Items φD×L(mm)	35			50		
	Capacitance (μF)	Impedance(Ωmax.) (20°C/100kHz)	Rated ripple current(mArms) (105°C/10k to 200kHz)	Capacitance (μF)	Impedance(Ωmax.) (20°C/100kHz)	Rated ripple current(mArms) (105°C/10k to 200kHz)
5×11				2.2	3.0	45
5×11				3.3	2.7	55
5×11				4.7	2.0	90
5×11				10	1.7	110
5×11	33	0.72	180	22	1.2	120
5×11	47	0.50	180	33	0.95	130
6.3×11	100	0.24	280	47	0.56	190
8×11.5	220	0.15	560	100	0.30	320
10×12.5	330	0.086	710	220	0.16	520
10×16	470	0.066	950	330	0.12	670
10×20				470	0.088	820
12.5×20	1000	0.042	1460			
12.5×25				1000	0.053	1200
16×25	2200	0.026	2000			
16×31.5				2200	0.029	1750
16×35.5	3300	0.022	2200			

Please refer to page 14 for ripple current frequency coefficients.

Part number


- ME-SZ
- ME-SAX
- ME-SWG
- ME-LS
- ME-CZ
- ME-CA**
- ME-CX
- ME-AX
- ME-WX
- ME-WA
- ME-WL
- ME-WG
- ME-FX
- ME-FC-FD
- ME-FH
- ME-SWN
- ME-HWN