


Dimensions

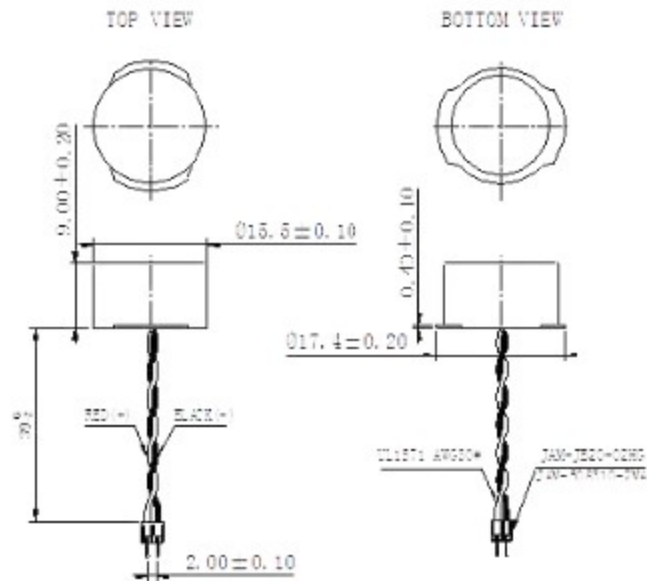

Specifications

Item	Specification
Resonant frequency	$48 \pm 1.0 \text{ KHz}$
Sensitivity	$500 \sim 800 \mu\text{S}$
Decay time	$1.2 \sim 1.8 \text{ mS}$ at $25 \pm 3^\circ\text{C}$ $\leq 2.2 \text{ mS}$ at -40 to 85°C
Directivity(deg) X-axis	65°
Directivity(deg) Y-axis	65°
Capacitance	$1400 \pm 20\% \text{ pF}$
Max.Input Volt	140 Vp-p
Mean time to failure	50000 hs
Operating temperature	$-40^\circ\text{C} \sim +85^\circ\text{C}$