


Dimensions

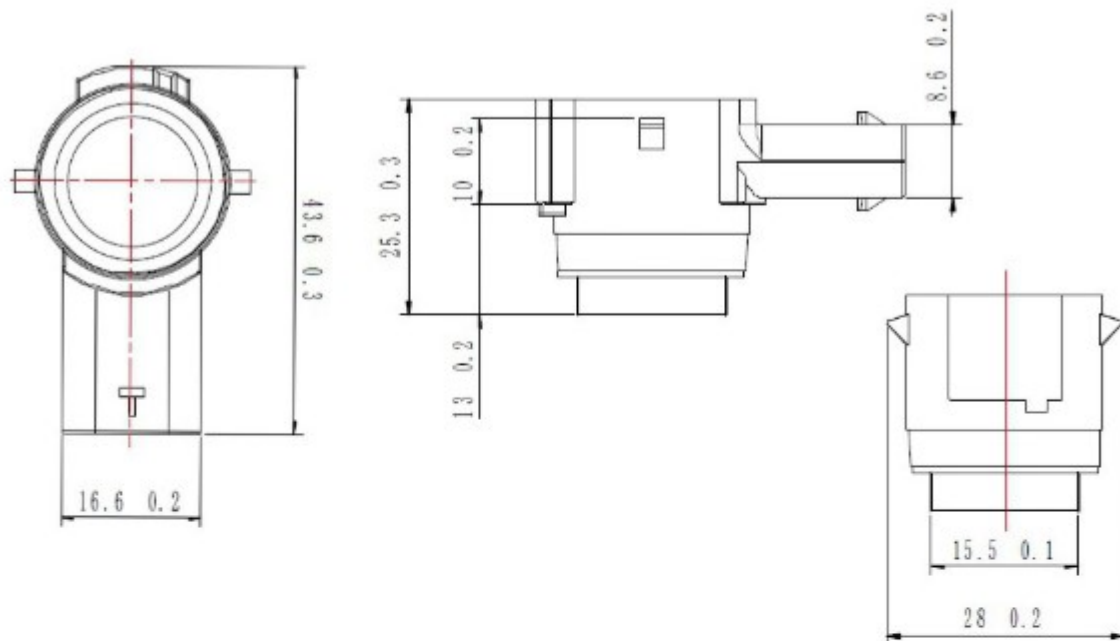

Specifications

Item	Specifications
Resonant frequency	55.5 ± 1.0 kHz
Ring time	≤1.50 mS
Directivity(deg) X-axis	90°±10°
Directivity(deg) Y-axis	45°±10°
Capacitance	1300±20%pF
Max. input voltage	140Vp-p
Operating temperature	-40~+85°C