
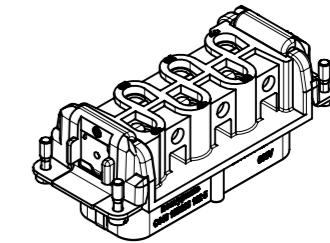
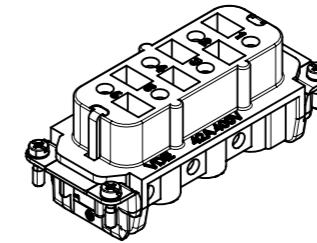
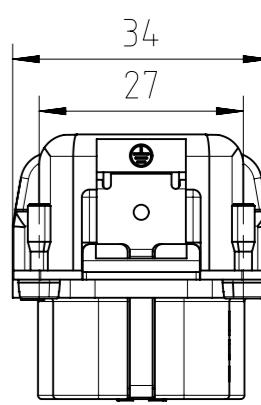
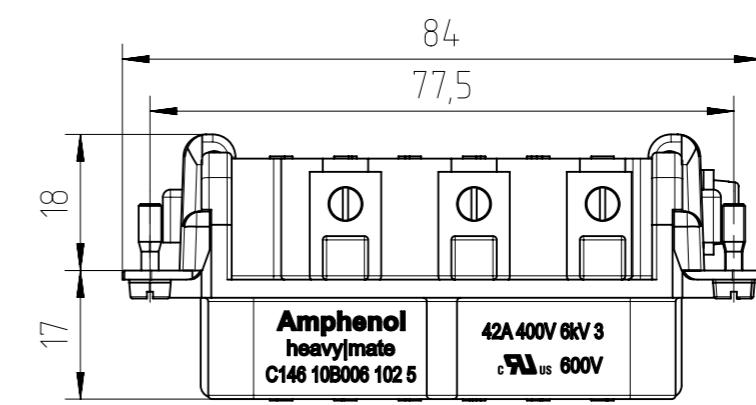


## Characteristics

General Characteristics	Standard	Value
number of contacts		6 + PE
termination technique		screw (with wire protection)
wire gauge		0,5 mm <sup>2</sup> - 6 mm <sup>2</sup> AWG 20 - AWG 10
max. insulation diameter		6,4 mm
flammability	UL 94	V-0
Electrical Characteristics	Standard	Value
rated voltage	IEC 60664-1	400 V (UL/CSA 600V)
pollution degree	IEC 60664-1	3
installation (overvoltage) category	IEC 60664-1	3
material group	IEC 60664-1	2
rated impulse withstand voltage	IEC 60664-1	6 kV
rated current T <sub>amb</sub> = 40 °C		42 A
current carrying capacity	IEC 60512-5-2	see derating curve
contact resistance	IEC 60512-2-1	≤ 5 mΩ
insulation resistance	IEC 60512-3-1	≥ 10 <sup>10</sup> Ω
Climatical Characteristics	Standard	Value
climatic category	IEC 60068-1	40 / 125 / 21
upper temperature	IEC 60512-11-9	+125 °C
lower temperature	IEC 60512-11-10	-40 °C
Mechanical Characteristics	Standard	Value
mechanical operation	IEC 60512-9-1	≥ 500 mating cycles
tightening torque of screw contacts	EN 60999-1	min. 0,8 Nm
Materials	Standard	Value
insert		PA GF black
contacts		CuZn (brass)
contact plating		Ag (silver)

Alle technischen Daten wurden unter Laborbedingungen ermittelt und können im Praxisbetrieb abweichen.  
Es handelt sich bei den Angaben weder um Beschaffungs- noch um Haltbarkeitsgarantien.  
All technical data have been measured in a laboratory environment and can be different during practical usage of the product. Any product information is for descriptive usage only and not legally binding, particularly the information does not constitute or provide any legal guarantees ("Beschaffungsgarantie" or "Haltbarkeitsgarantie").

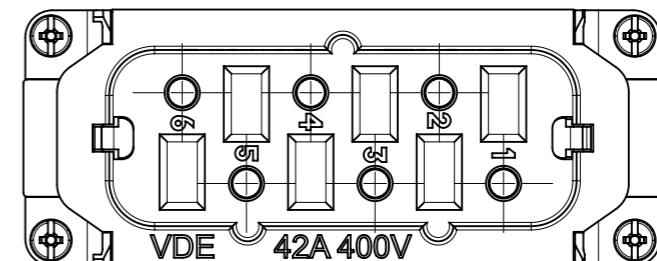

Gewicht (errechnet) / Calc WT : 100 g	Zul. Abw./Tolerances :	Maßstab / Scale : 1:1 (1:2)	A3
Prüfmaß / Testdimension	ISO 2768-m	DIN / ISO 13715	
Teileindex / Partindexnumber:			
Bagatelle change:			
Gez. Drawn	27.11.2014		
Status	jhoenninge		
Gepr. Checked	Released		
	20.02.2019		
	MGRIMM		
CUSTOMER DRAWING			
Buchseneinsatz 6-Pol + PE socket insert 6 pole + PE			
Amphenol Tuchel Industrial GmbH		M   C146 10B006 102 5	Blatt/Sheet 1 1 Bl.
03	201800468	18.02.2019 PWÖLF	
Index	Änderung/Description	Datum/Date	Name
Ers. f. / Replacement for : M-C146 10B006 102 5 Rev.02			