



EBRT10E100D



Excellen Schottky Barrier Rectifiers



DO-201AD

Features
<ul style="list-style-type: none"> • Guardring for overvoltage protection • Very small conduction losses • Low forward voltage drop • Component in accordance to RoHS 2002/95/EC

Ordering Information		
Part No.	Package	Packing
EBRT10E100D	DO-201AD	500 / BOX

Device P/N	
Part Number	Remark
EBRT10E100D	General
EBRT10E100D-H	Halogen Free

Primary Characteristics		
I_F	10	A
V_{RRM}	100	V
I_{FSM}	100	A
V_F	0.67	V
$T_J \text{ max}$	150	°C

Mechanical Data
<ul style="list-style-type: none"> • Cases: DO-201AD • Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 • Terminals: Lead free Plating (Tin Finish) Solderable per MIL-STD-202, Method 208 • Polarity: Cathode Band • Weight: 1.071 grams (approximate)

Maximum Ratings (TA=25°C unless otherwise noted)			
PARAMETER	SYMBOL	EBRT10E100D	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	100	V
Maximum RMS voltage	V_{RMS}	70	V
Maximum DC blocking voltage	V_{DC}	100	V
Maximum average forward rectified current	I_F	10.0	A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	100.0	A
Maximum Instantaneous Forward Voltage IF=2A @ 25°C IF=10A @ 25°C	V_F	0.44 Typ. 0.67 Max.	V
Maximum DC Reverse Current @ TA=25°C at Rated DC Blocking Voltage @ TA=100°C	I_R	0.2 20	mA
Typical Junction Capacitance(NOTE1)	C_j	545	pF
Typical Thermal Resistance	$R_{\theta JC}$	20	°C/W
Operating Temperature Range	T_J	-55 to +150	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C
Marking Code		T10E100D、10E100D	

NOTES:

1.Measured at 1.0MHZ and applied reverse voltage of 4.0V DC



Rating and Characteristics Curves

FIG. 1-Typical Forward Current Derating Curve

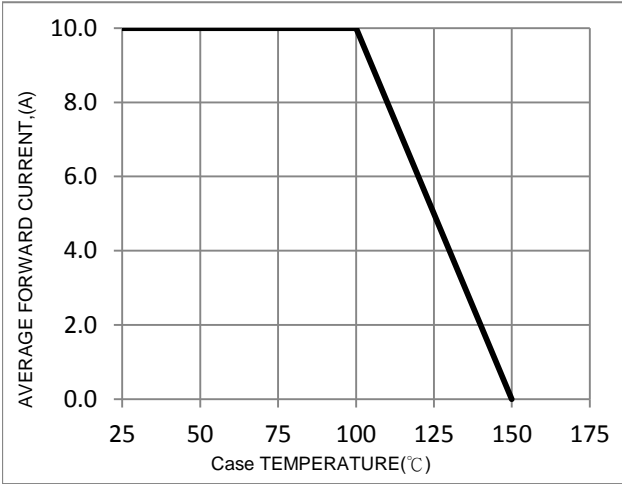


FIG. 2-Typical Forward Characteristics

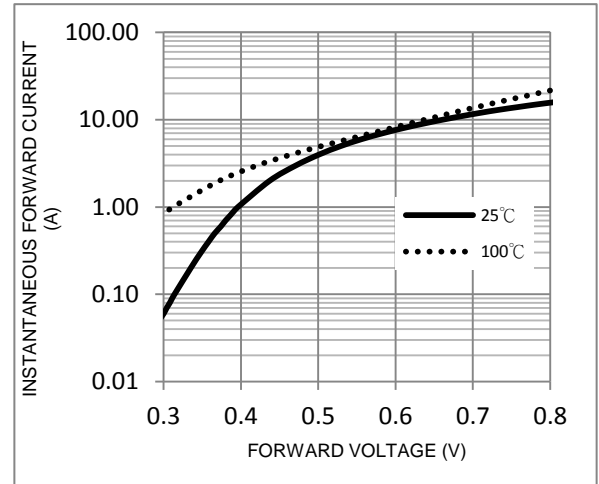


FIG. 3-Maximum Non-Repetitive Forward Surge Current

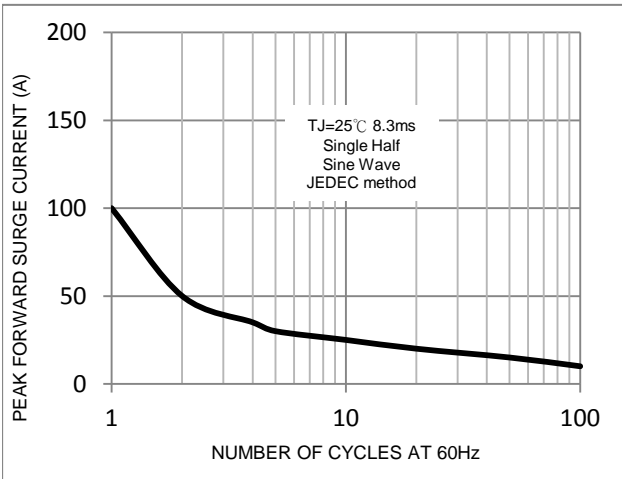


FIG. 4-Typical Reverse Characteristics



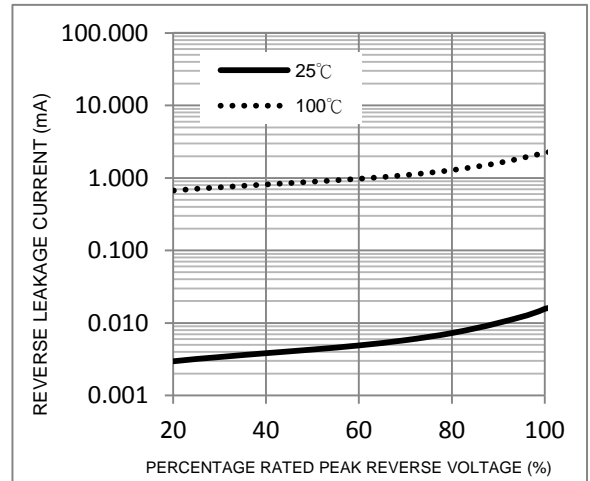


FIG. 5-Typical Junction Capacitance



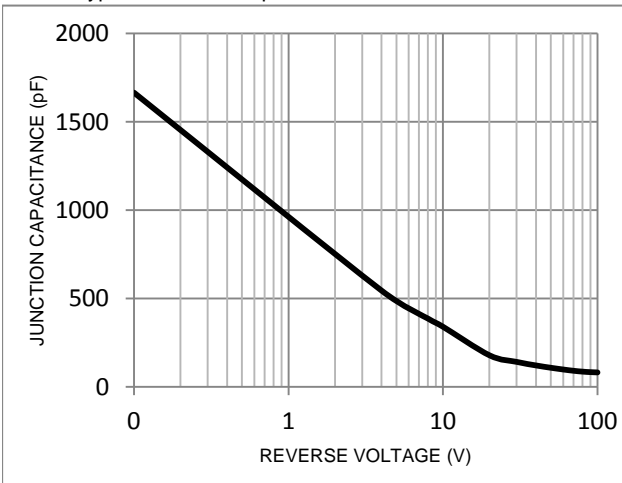


Package Outline Dimensions

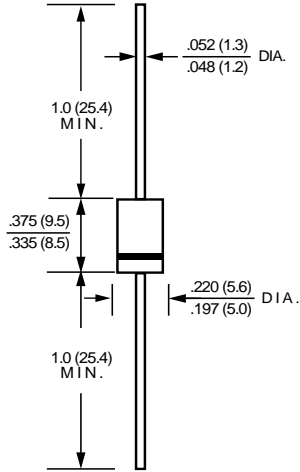

DO-201AD

Dimensions in inches and (millimeters)

Marking Information

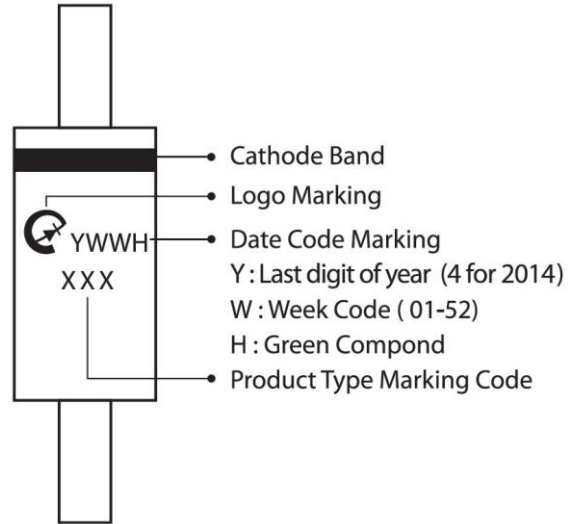

Bulk Packing

Package	Inner Pack	Inner Box (EA)	Inner Box (mm)	Carton (EA)	Carton Size (mm)	Gross Weight (Kg)-Approx.
DO-201AD(DO-27)	Box	500	300x77x39	12000	475x220x260	16